

# Linear LED Fixture Spec Sheet



LVLBP33-XX-YY-ZZ


Pendant and Surface Mounted Linear Lighting



## Quick Specs

<b>Part #</b>	LVLBP33-XX-YY-ZZ
<b>Sizes</b>	2ft, 4ft, 6ft, 8ft, 12ft, 16ft
<b>Input Voltage</b>	120-277VAC
<b>Light Output</b>	<b>HO:</b> 1,250 lumens/ft <b>UHO:</b> 1,875 lumens/ft
<b>Efficiency</b>	87 lumens/Watt
<b>Color Rendering</b>	>80 (CRI over 90 available)
<b>Environment</b>	Dry or Damp Location
<b>Warranty</b>	5-Year
<b>Lifetime</b>	50,000-70,000+ Hours
<b>Listings</b>	UL Listed Components, UL Type-P Driver
<b>Dimming</b>	<b>0-10V</b> Dimmable to 1%

## Dimensions

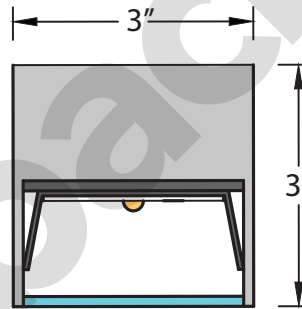

## Available Color Temperatures

3000K



Warm White

4000K



Natural White

5000K



Bright White

Our 3" x 3" Linear LED Fixture is a high output linear light source suitable for general lighting applications. It can be both **surface mounted**, or **pendant (suspended) mounted** with cables for a wide variety of residential, commercial, retail, and hospitality lighting applications.

This linear LED fixture is available in **2ft, 4ft, 6ft, 8ft, 12ft, and 16ft** sizes as one single piece. Select "**linkable**" option for seam-less continuous runs over 16ft. Choose from (2) light output levels: **HO** High Output (1,250 lumens/ft), or **UHO** Ultra High-Output (1,875 lumens/ft).

Conveniently select from (3) standard color temperatures best suited to your space: **3000K** (Warm White), **4000K** (Natural White), **5000K** (Bright White).

Integral driver technology allows these fixtures to accept **universal 120-277VAC** input voltage, and are **fully dimmable to 1%** via 0-10V dimming wires.

## Surface Mount View



GlowbackLED®

16409 NW 8<sup>th</sup> Ave

Miami Gardens, FL 33169

1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc  
©2018 Bluegate Inc. All Rights Reserved  
Specifications subject to change without notice



# Linear LED Fixture Spec Sheet



**LVLBP33-XX-YY-ZZ**  
Pendant and Surface Mounted Linear Lighting

### Surface Mounting

**A** Clip Mounting

**B** Direct-Screw Mounting

### Pendant Mounting

Select Ceiling Type:

**C** Drywall/Solid mount to JBOX

**B** Drywall/Solid to remote JBOX

**E** Drop Ceiling mount to T-Bar

**F** High Bay mount to Structure

### Run Type

**Single Run:**

2ft 4ft 6ft 8ft 12ft 16ft

---


**Continous Run:**

Powered End      Center      End

## Detailed Product Specs

Fixture Size	Part #	Net Size	Wattage	Lumen Output
2ft	LVLBP33-HO-24-XX	24"	28	2,500
4ft	LVLBP33-HO-46-XX	46"	55	5,000
6ft	LVLBP33-HO-68-XX	68"	83	7,500
8ft	LVLBP33-HO-90-XX	90"	110	10,000
12ft	LVLBP33-HO-134-XX	134"	165	15,000
16ft	LVLBP33-HO-178-XX	178"	220	20,000
2ft	LVLBP33-UHO-24-XX	24"	47	3,750
4ft	LVLBP33-UHO-46-XX	46"	94	7,500
6ft	LVLBP33-UHO-68-XX	68"	140	11,250
8ft	LVLBP33-UHO-90-XX	90"	187	15,000
12ft	LVLBP33-UHO-134-XX	134"	280	22,500
16ft	LVLBP33-UHO-178-XX	178"	374	30,000

XX= Color Temp Code (WW=Warm White 3000K, NW=Natural White 4000K, BW= Bright White 5000K)

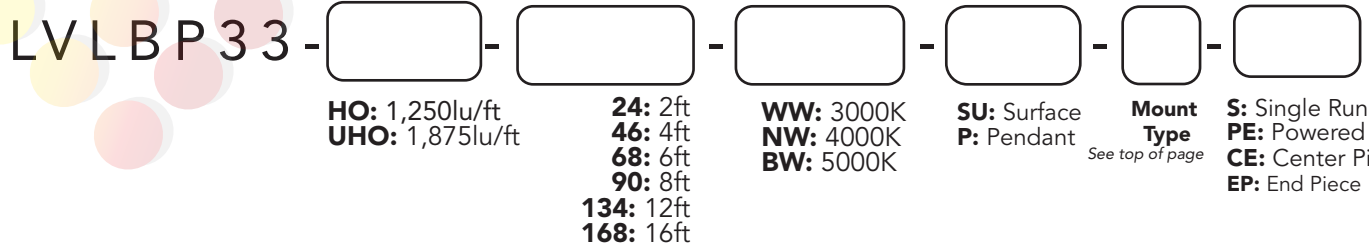

**GlowbackLED®**  
16409 NW 8<sup>th</sup> Ave  
Miami Gardens, FL 33169  
1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc  
©2018 Bluegate Inc. All Rights Reserved  
Specifications subject to change without notice

