




## LVLBY43T-XX-YY-ZZ LVLBY43T Spec Sheet

## **Mounting Options**




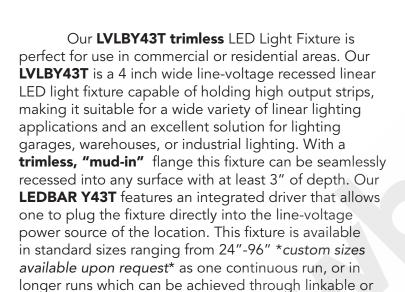


## **Features**


- 120-277VAC or 347VAC Input
- Standard >80 CRI, CRI>90 available!
- **Trimless Design Achieves Seamless Recession**
- 0-10V Dimmable (With Dimmable Driver)
- Ultra Long Lifetime (70,000+ Hours)
- **UL-Listed**
- 5-Year Warranty

custom configurations.



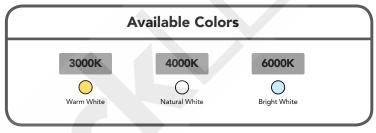

	Quick Specs
Sizes	From 24"-90" (Linkable For Long runs)
Input Voltage	120-277 or 347VAC
Power Output	Power Output Per Size
	<b>2ft:</b> 28W <b>4ft:</b> 55W <b>6ft:</b> 83W <b>8ft:</b> 104W
Light Output	Lumen Output Per Size
	<b>2ft</b> :2,486 <b>4ft</b> : 4,972 <b>6ft</b> : 7,458 <b>8ft</b> : 9,944
Efficiency (lu/W)	90 Lumens/Watt
Lifetime	50,000+ Hours (L-50)
Environment	Suitable for Dry or Damp Locations
Power-Feed Type  End-Cap Powerfeed Exit  Rear Powerfeed Exit	Dimensions  2.875°



**68:** 6ft

**90:** 8ft

**BW:** 6000K

 $\textbf{Glowback} \textbf{LED} \\ \textbf{@} \text{ is a registered trademark of Bluegate Inc} \\$ ©2018 Bluegate Inc. All Rights Reserved Specifications subject to change without notice

B: End-Cap

see top of page

