

PRODUCT OVERVIEW

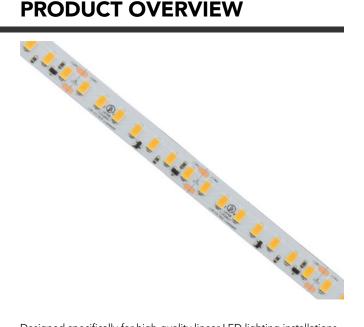


Designed specifically for high-quality linear LED lighting installations, our 24V WhiteCS56128CRI LED strip allows you to create long lasting, headache-free designer-grade lighting right out of the package. Easily cut, peel, and stick the flexible light tape to your mounting surface using the durable and permanent 3M® adhesive backing. Achieve well over 50,000 hours of useful lighting when used with one of our aluminum profiles for LED strips to draw out the heat and protect the strips from damaging elements. Our 24V WhiteCS56128CRI LED Tape comes with the UL-stamp of approval and is **UL-listed** for use in both the United States and Canada (cUL).

The 24V White CS56128CRI LED Strip comes in a 16'5" roll/reel and is 0.47" (12mm) wide. 5630 LED chips are mounted on a flexible PCB every **0.20"** apart. The full LED strip spool has about 640 LED chips packed in a high-density—39 LED/ft (128/M)—configuration. The LED strip comes with (1) 6" 18-2 wire lead with bare, tin-coated ends, for fast and reliable wire-to-wire connections. This LED Strip produces an average of 675 lumens/ft and consumes an average of 7.1 Watts/ft and 95 lumens/watt. Effortlessly cut this LED strip every 2" (or every 6 LED chips).

Strip Specifications *[XX] denotes color temperature	
Part#	24VCS56128CRIXX*
Roll Length	16′5″ (197″)
Input Voltage	24VDC
Strip Width	0.47" (12mm)
Cut Increments	Cuttable every 2"
Color Rendering	>95
LED Type	5630
LED Density	36 LED's per foot (128/M)
Wattage	7.1 Watts/ft
Light Output	675 Lumens/ft
Efficiency	95 Lumens/Watt
Lifetime	50,000 Hours (Average)
Warranty	3-Year Limited Warranty
IP-Rating	IP-23 (For Indoor Use Only)
Listings	UL-Listed (US and Canada)








Features

- High Density (128/M) or 39 LED/ft configuration.
- Ultra-High Color Rendering Score (95+).
- High-Quality LED Strip! Excellent thermal management for long lasting installations.
- **UL-Listed!** (in US and Canada) Specify our strips on any commercial project!
- Dimmable with dimmable power supply.
- Available in a wide range of color temperatures.

GlowbackLED® is a registered trademark of Bluegate Inc ©2024 Bluegate Inc. All Rights Reserved Specifications subject to change without notice

BLUEGATE



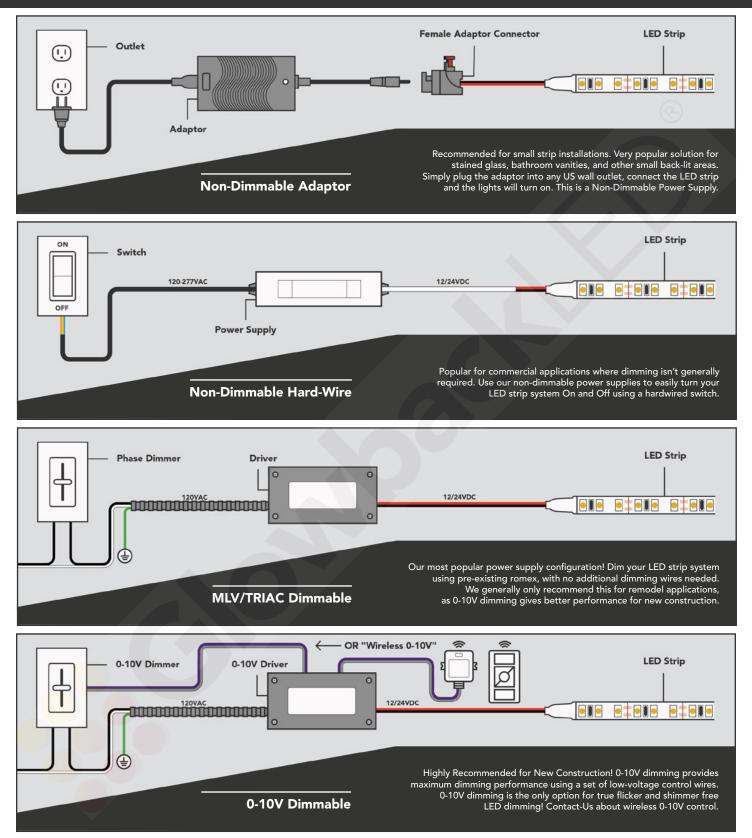

All of our LED Panels require a remote power supply and/or controller to operate. Seamlessly integrate our LED Panel systems with any type of home or building automation system. Unless otherwise specified, all LED Panel systems, including power supplies and controllers are shipped to you pre-configured, to facilitate installation. Power-Supplies will come "rigged" with connectors to match the connectors coming off the LED panels. When ordering, simply give us some details about the level of control that you want, and our team will design a turn-key control system fit to meet your needs.

