
## **Compact Splicing Connectors**, 222 Series LEVER-NUTS®








2) Push up lever



3) Insert conductor and push down lever

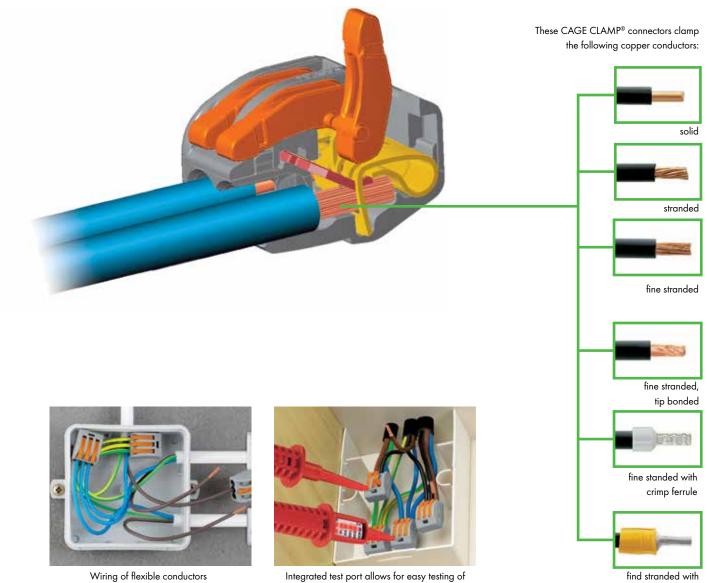

in a junction box

Integrated test port allows for easy testing of connection integrity

crimped pin terminal

## **Compact Splicing Connectors**, 222 Series LEVER-NUTS®

Cross section: 28 - 12 AWG

(solid, stranded and flexible)

600 V (1000 V signs and fixtures) **Electrical specs:** 

9 - 10 mm / 0.37 in Strip length: Maximum operating temperature: 105° C

20 A maximum \* Based on 2008 NEC current rating of max conductor size Approvals: UL, ENEC, PSE, ABS

Also approved for grounding and bonding

For all connections requiring...

- Stranded / solid wires
- Wide range of wire sizes
- Combination of different wire sizes and types in one connector
- Small space consumption
- Built-in test point
- Protection against electrical shock, touch safe
- Low installed cost and safe operation
- Maintenance-free connection
- A reusable connector

2-conductor connector



3-conductor connector





5-conductor connector



Item No.	Packunit pcs	Item No.	Packunit pcs	Item No.	Packunit pcs
222-412		222-413		222-415	
222-412/K194-4045	50 pc box (1=50)	222-413/K194-4045	50 pc box (1=50)	222-415/K194-4045	40 pc box (1=40)
222-412/PW05-0005	5 pc blister pack	222-413/PW05-0005	5 pc blister pack	222-415/PW05-0005	5 pc blister pack
222-412/PW05-350	350 pc jar	222-413/PW05-250	250 pc jar	222-415/PW05-150	150 pc jar
222-412/VE00-2500	2,500 pc bulk bag	222-413/VE00-2500	2,500 pc bulk bag	222-415/VE00-1000	1,000 pc bulk bag







Accessories	Item No.	Packunit pcs	
Wire cutting and	206-124	1	
stripping tool (34-8 AWG)			
Operating tool for Series 222	210-101	1	



Operating tool



Wire cutting and stripping tool

## **Packaging Options**



Box





Blister Pack