

Installation Instructions




LVLYXX
120-277 or 347VAC Recessed Linear Light Fixture




WARNING! Luminaire must be installed by a qualified electrician. Refer to local codes for proper installation. To prevent shock disconnect power before installation on service.


Y23

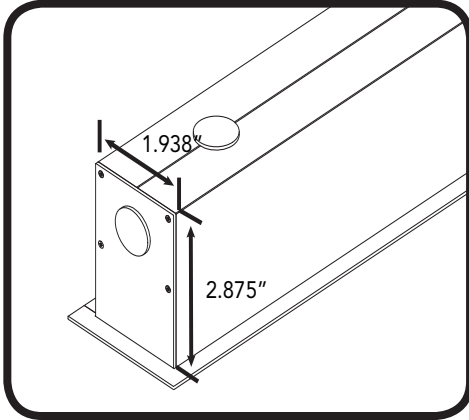

Y33

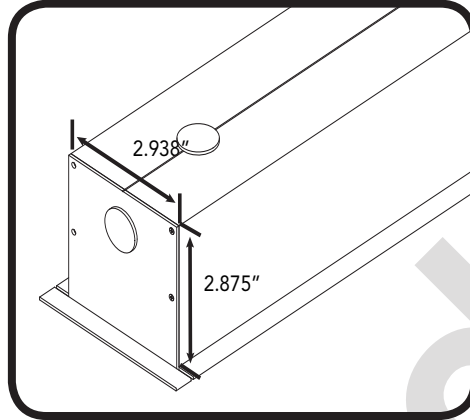


Y43 & Y43C

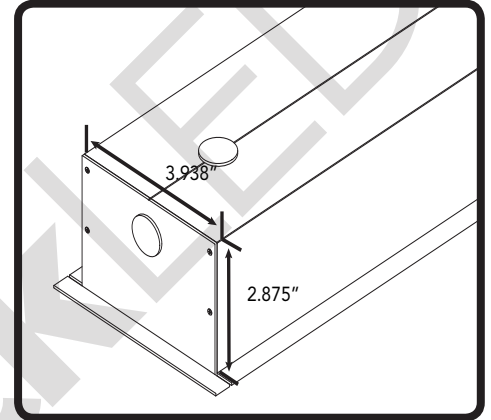


Required Opening Size

Fixture	Dimension	Required Opening	Weight
2ft Y23	2" x 3" x 24"	2¼" x 3¼" x 24¼"	5 Lbs
4ft Y23	2" x 3" x 46"	2¼" x 3¼" x 46¼"	7 Lbs
6ft Y23	2" x 3" x 68"	2¼" x 3¼" x 68¼"	9 Lbs
8ft Y23	2" x 3" x 90"	2¼" x 3¼" x 90¼"	12 Lbs
2ft Y33	3" x 3" x 24"	3¼" x 3¼" x 24¼"	6 Lbs
4ft Y33	3" x 3" x 46"	3¼" x 3¼" x 46¼"	9 Lbs
6ft Y33	3" x 3" x 68"	3¼" x 3¼" x 68¼"	12 Lbs
8ft Y33	3" x 3" x 90"	3¼" x 3¼" x 90¼"	14 Lbs
2ft Y43	4" x 3" x 24"	4¼" x 3¼" x 24¼"	7 Lbs
4ft Y43	4" x 3" x 46"	4¼" x 3¼" x 46¼"	10 Lbs
6ft Y43	4" x 3" x 68"	4¼" x 3¼" x 68¼"	14 Lbs
8ft Y43	4" x 3" x 90"	4¼" x 3¼" x 90¼"	17 Lbs

Direct Screw Installation

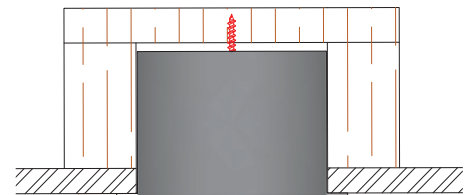

Twist Clip Installation

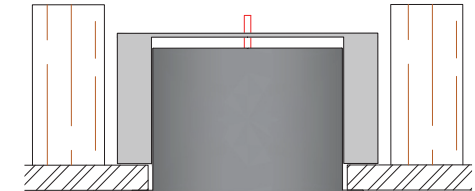

Trimless Installation



Drop-Ceiling Installation




Installation Instructions



LVLYXX
120-277 or 347VAC Recessed Linear Light Fixture

Direct Screw Installation

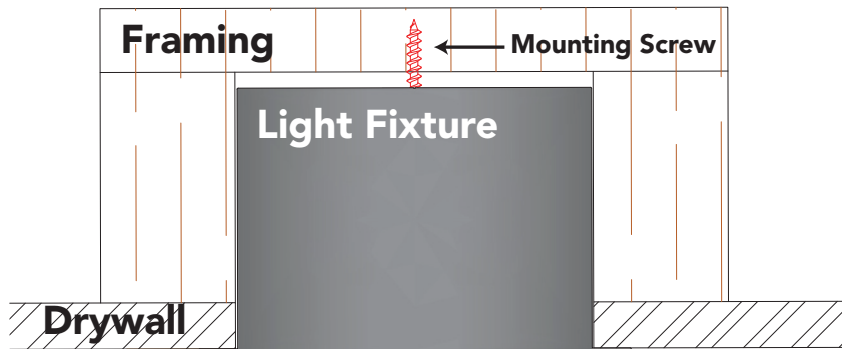






Recommended Installation Method!

Framing Required! Build framing on sides and top of light fixture for support.

Create Opening: Refer to chart on **Page 1** for required opening size.

Type IC: Suitable for IC contact.

Inherently Protected

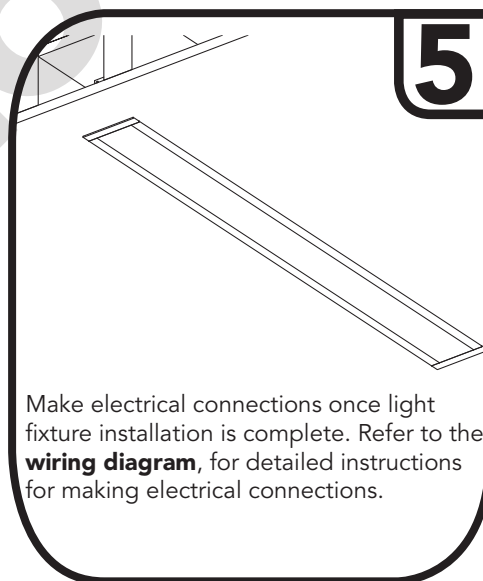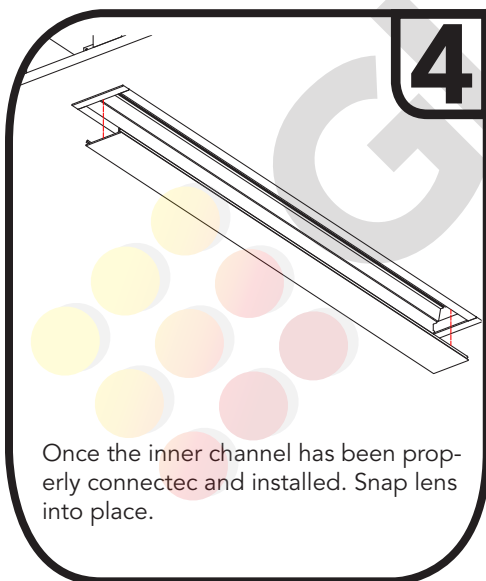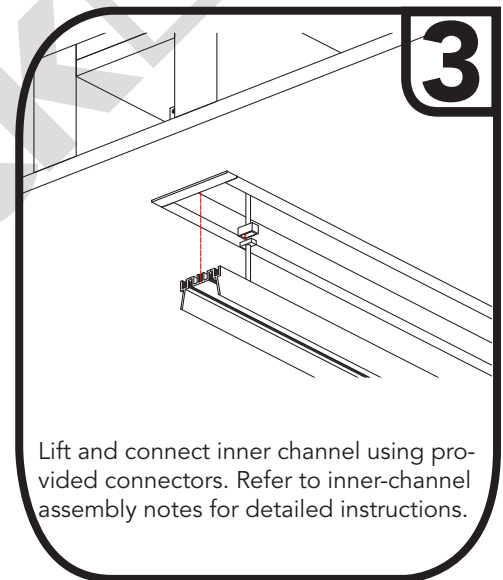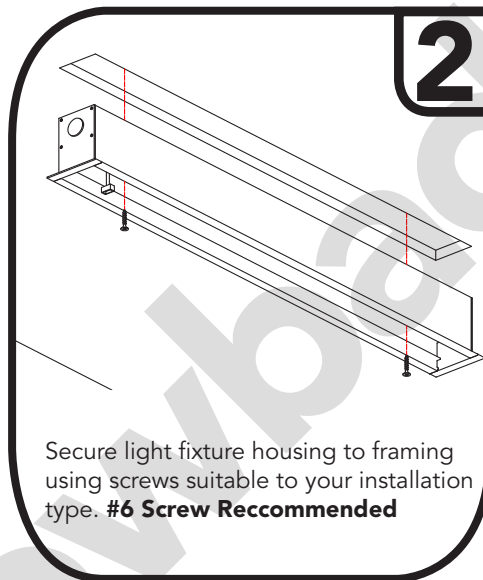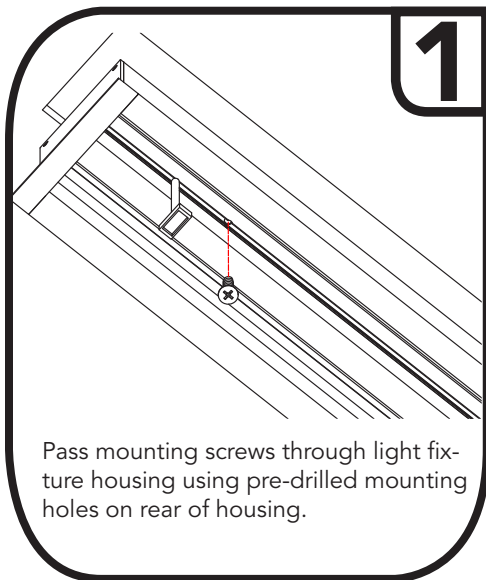

GlowbackLED®
1173 NW 159th Ave
Miami Gardens, FL 33169
1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc
©2018 Bluegate Inc. All Rights Reserved
Specifications subject to change without notice




Installation Instructions



120-277 or 347VAC Recessed Linear Light Fixture
LVLYXX

Twist-Clip Installation






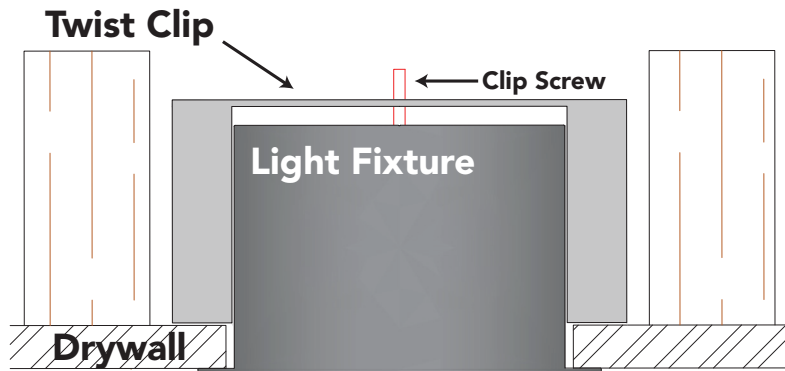


Twist Clip Mounting: Specialized clip secures light fixture to drywall.

Create Opening: Refer to chart on **Page 1** for required opening size.

Type IC: Suitable for IC contact.

Inherently Protected

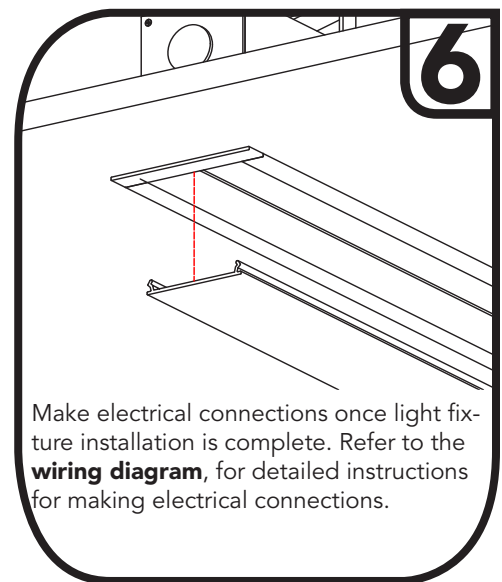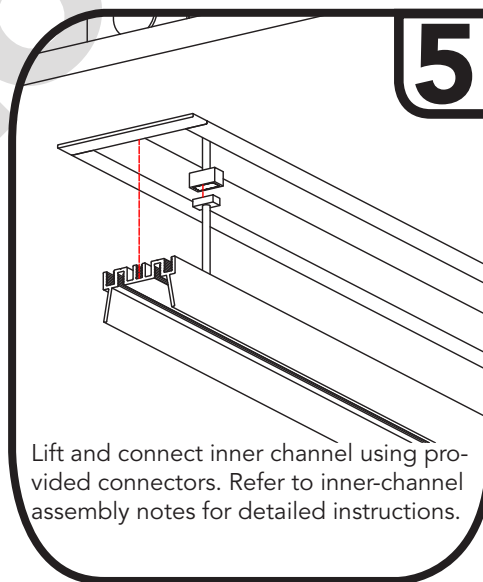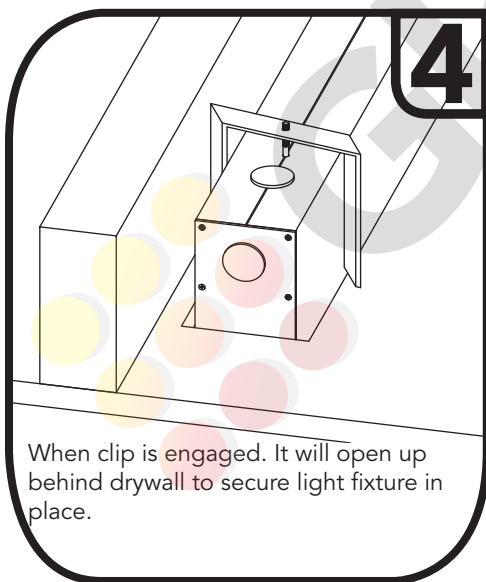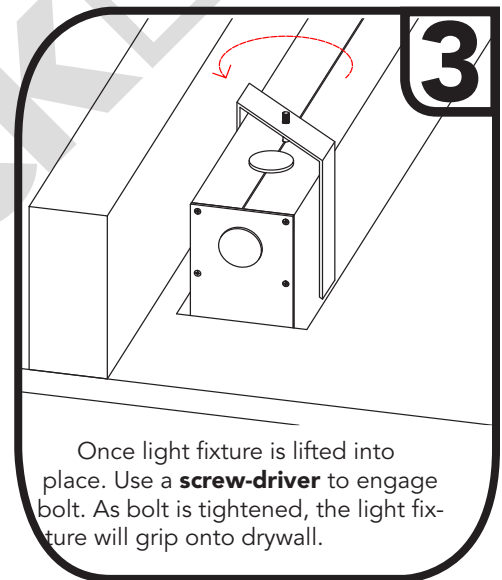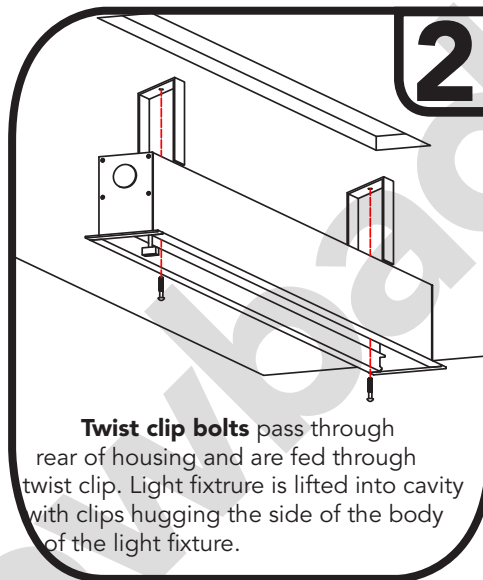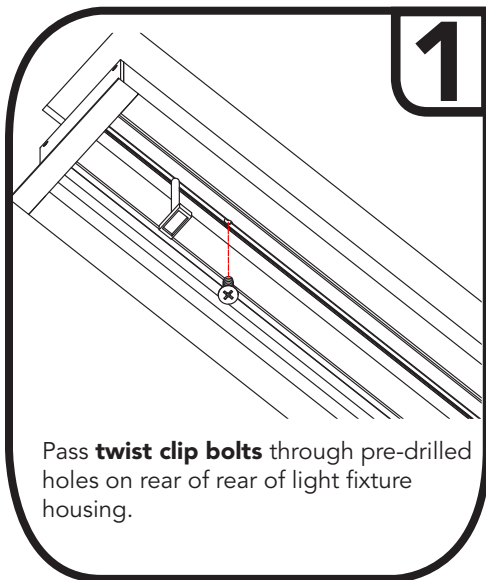

GlowbackLED®
1173 NW 159th Ave
Miami Gardens, FL 33169
1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc
©2018 Bluegate Inc. All Rights Reserved
Specifications subject to change without notice



Installation Instructions



LVLYXX
120-277 or 347VAC Recessed Linear Light Fixture

Drop Ceiling Installation




Adjustable Grid-Bracket: Adaptable to any grid structure and configuration.

Opening: Refer to chart on **Page 1** for required opening size. Opening created using grid-structure.


Suspension: Grid system must be suspended from ceiling and able to support weights listed on **Page 1**.

Type IC: Suitable for IC contact.


Inherently Protected

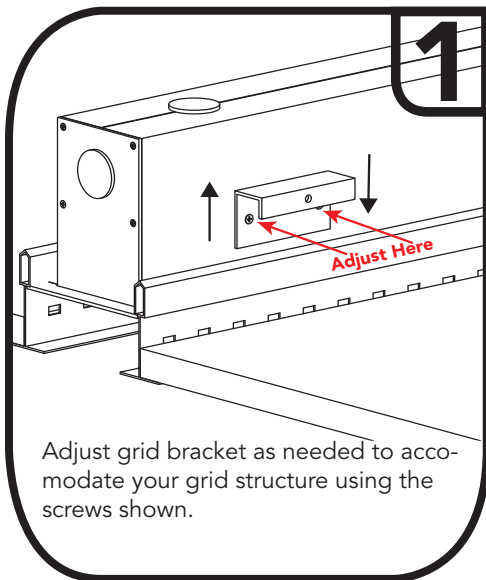


Adjust grid bracket as needed to accommodate your grid structure using the screws shown.

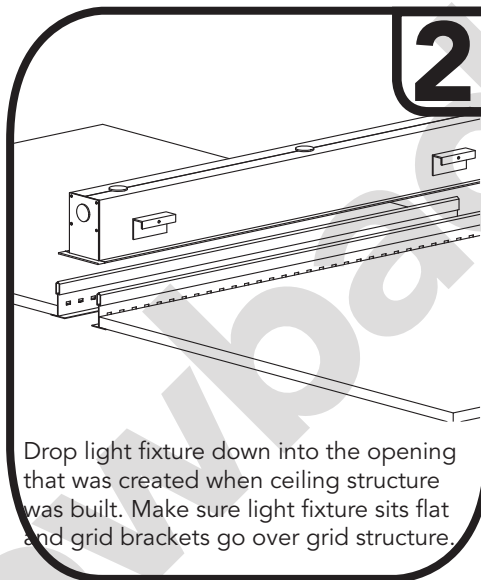

Drop light fixture down into the opening that was created when ceiling structure was built. Make sure light fixture sits flat and grid brackets go over grid structure.

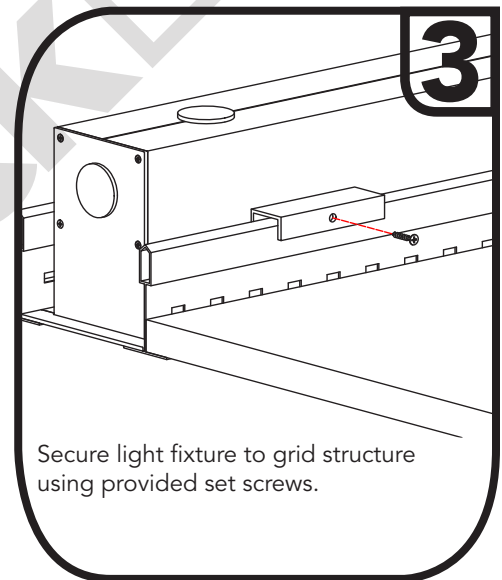

Secure light fixture to grid structure using provided set screws.

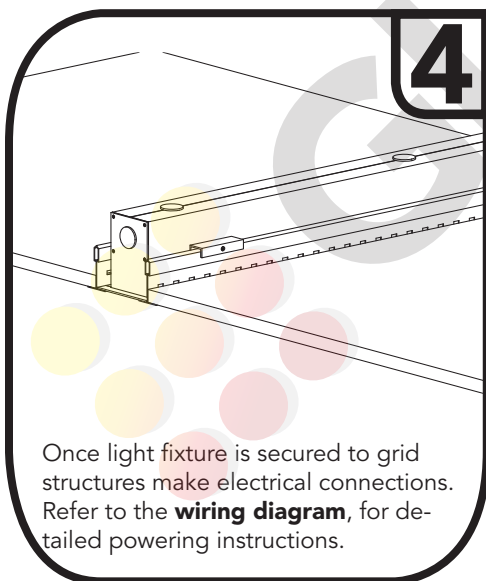

Once light fixture is secured to grid structures make electrical connections. Refer to the **wiring diagram**, for detailed powering instructions.

GlowbackLED®
1173 NW 159th Ave
Miami Gardens, FL 33169
1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc
©2018 Bluegate Inc. All Rights Reserved
Specifications subject to change without notice




Installation Instructions



LVLYXX
120-277 or 347VAC Recessed Linear Light Fixture

Twist-Clip Installation

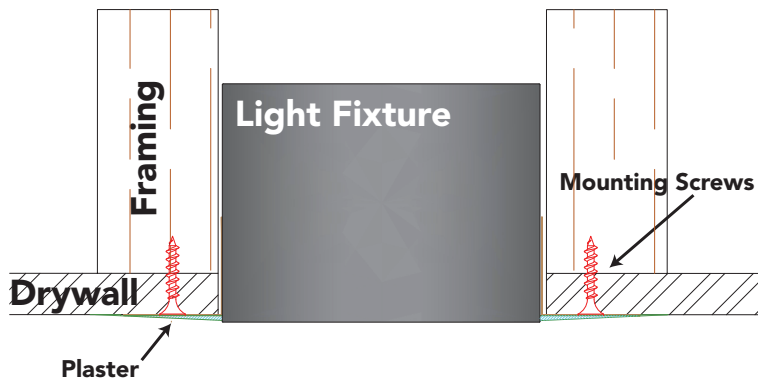






Framing Required! Build framing on either side of light fixture.

Create Opening: Refer to chart on **Page 1** for required opening size.

Screw Spacing: Mounting screws are required every 16" on center. **#6 Screw Recommended**

Type IC: Suitable for IC contact.

Inherently Protected

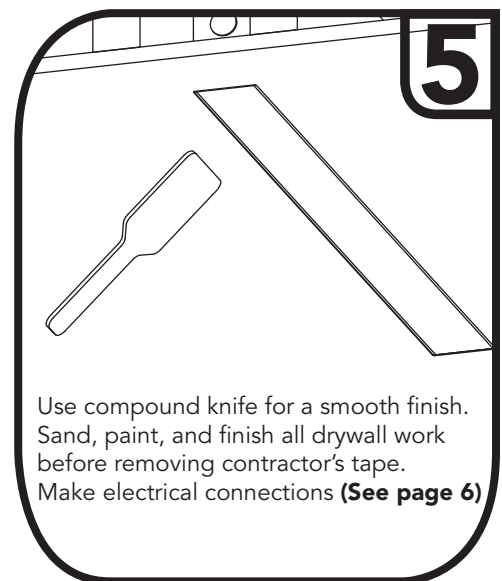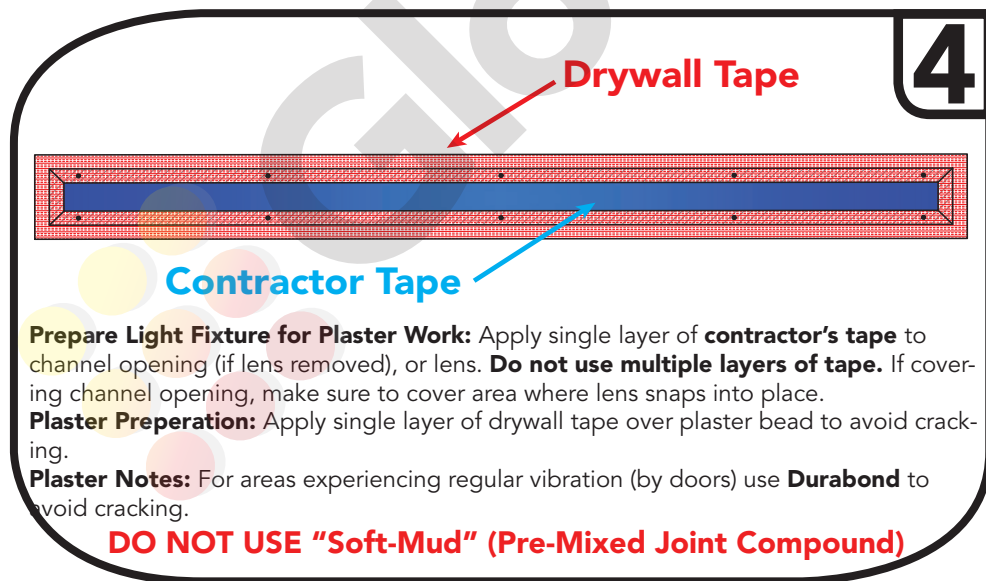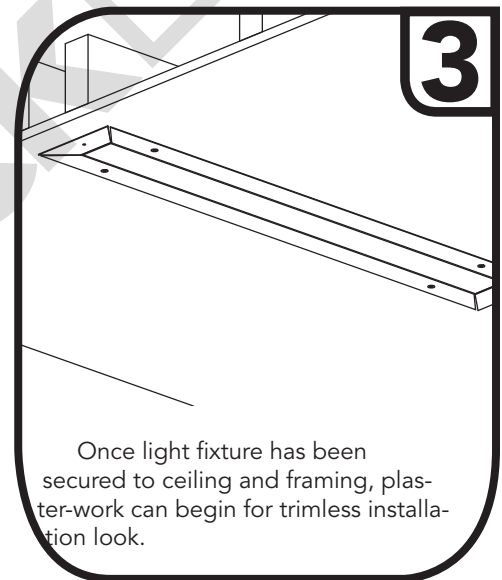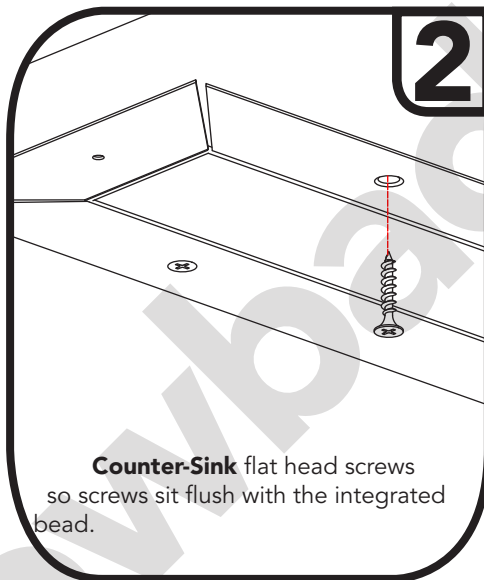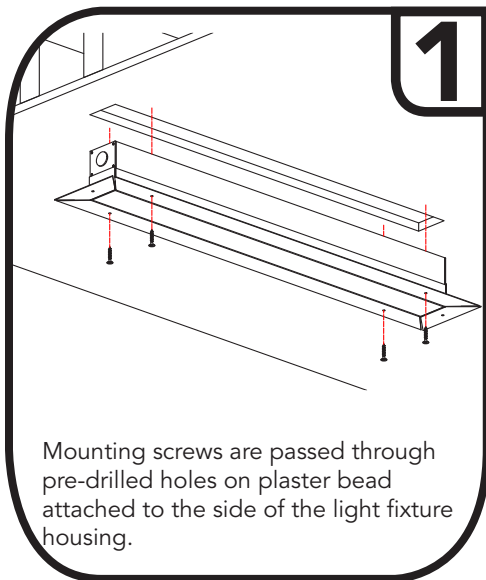

GlowbackLED®
1173 NW 159th Ave
Miami Gardens, FL 33169
1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc
©2018 Bluegate Inc. All Rights Reserved
Specifications subject to change without notice





Installation Instructions








LVLYXXX
120-277 or 347VAC Recessed Linear Light Fixture

Linkable/Continuous Run Connections

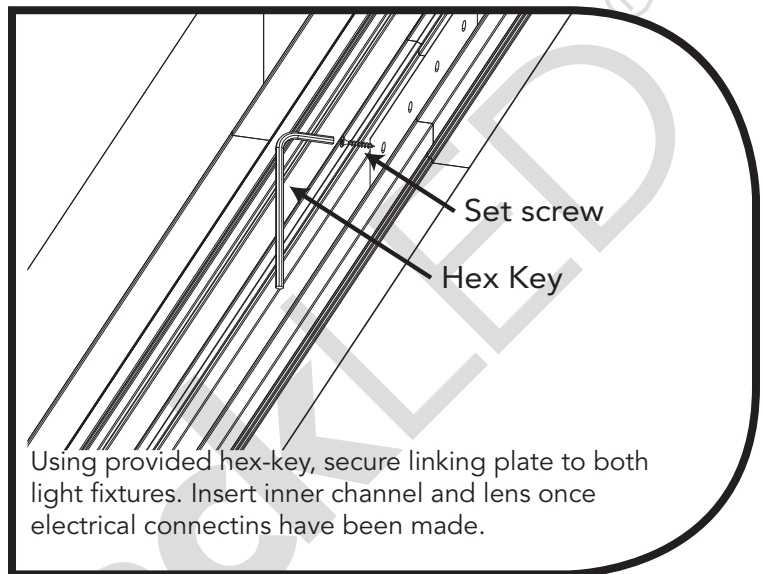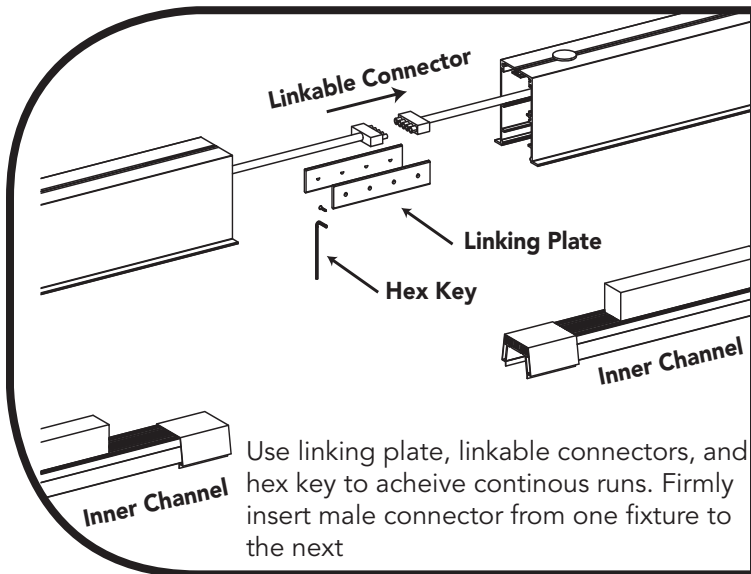

Inner Clip Connection

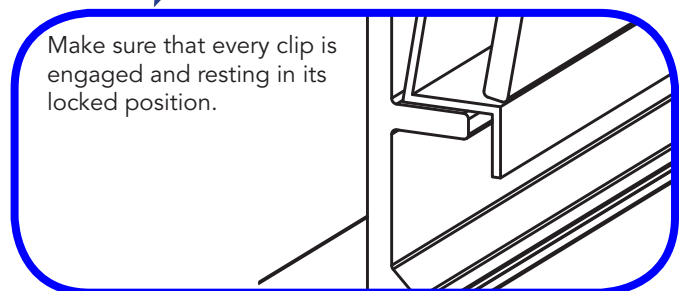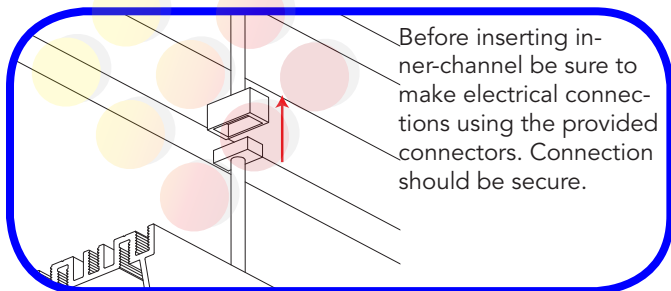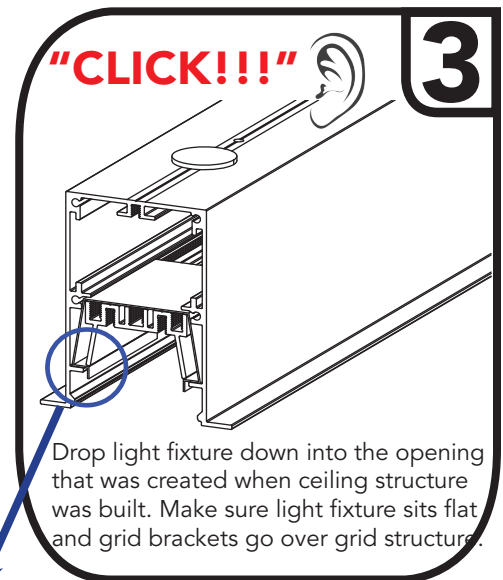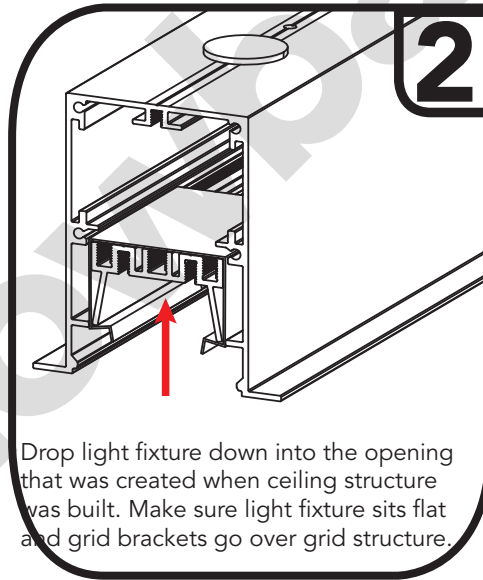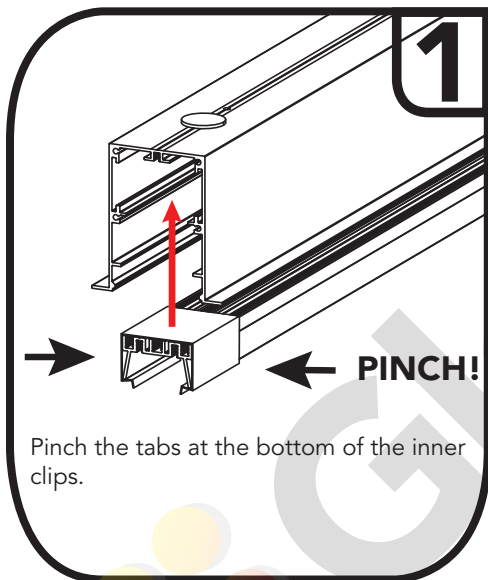

GlowbackLED®

1173 NW 159th Ave
Miami Gardens, FL 33169

1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc
©2018 Bluegate Inc. All Rights Reserved
Specifications subject to change without notice





Installation Instructions




LVLYXXX
120-277 or 347VAC Recessed Linear Light Fixture

Power-Feed Entry and Electrical Connections

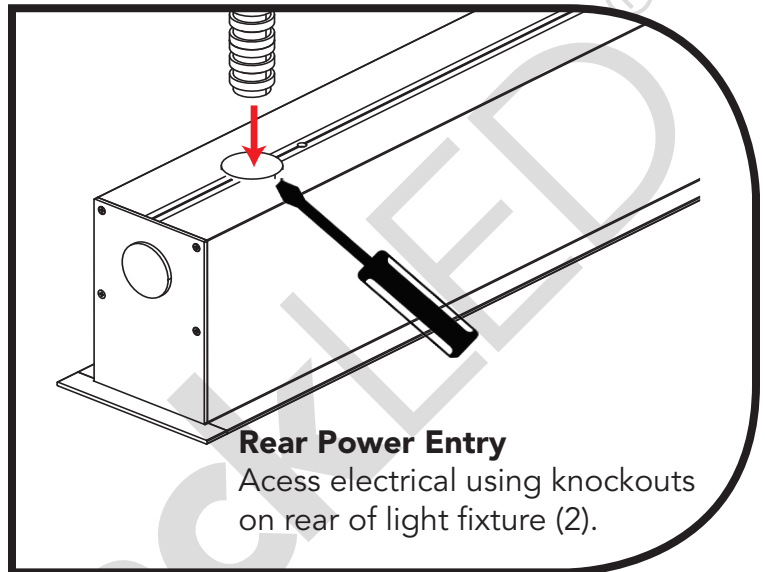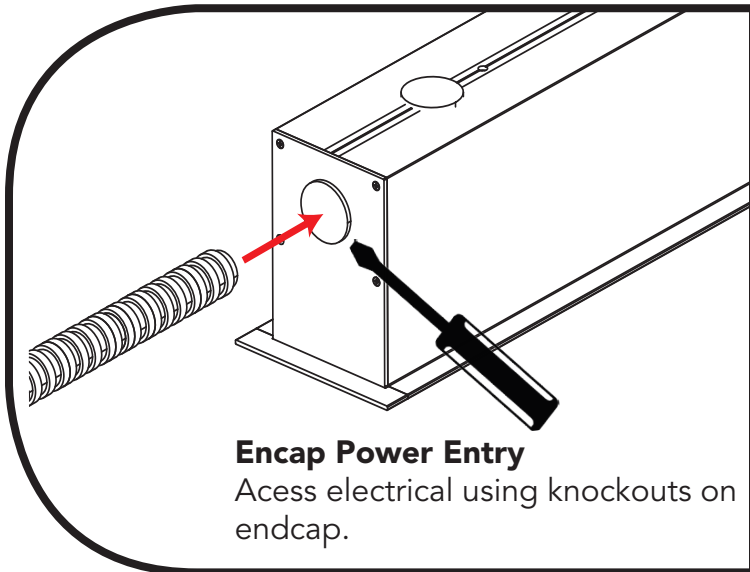

Non-Dimmable Configuration

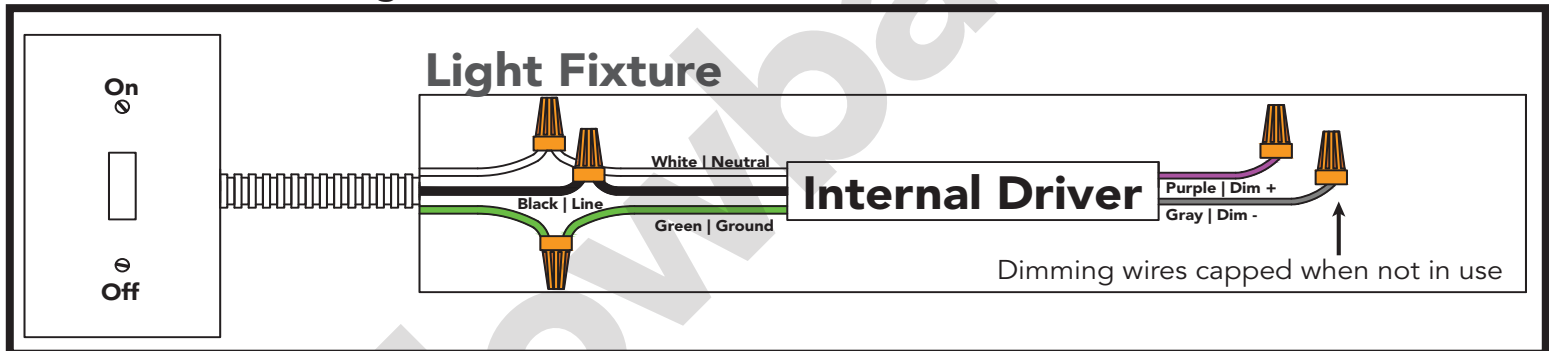

Dimmable Configuration

