


Linear LED Fixture Spec Sheet

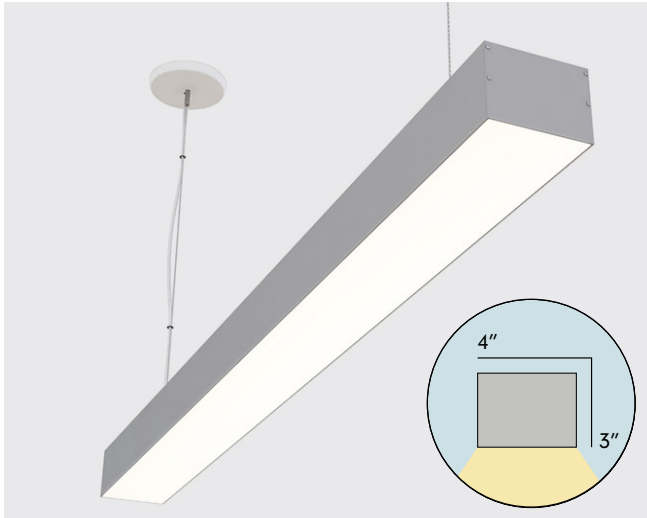

Our 4" x 3" Linear LED Fixture is a high output linear light source suitable for general lighting applications. It can be both **surface mounted**, or **pendant (suspended) mounted** with cables for a wide variety of residential, commercial, retail, and hospitality lighting applications.

This linear LED fixture is available in **2ft, 4ft, 6ft, and 8ft** sizes as one single piece. Select "**linkable**" option for seam-less continuous runs over 8ft. Boasting our widest housing for LED fixtures, our LVLBP43 LED Light fixture outputs a brilliant 1,284 lumens/ft.

Conveniently select from (3) standard color temperatures best suited to your space: **3000K** (Warm White), **4000K** (Natural White), **5000K** (Bright White). Integral driver technology allows these fixtures to accept **universal 120-277VAC** input voltage, and are **fully dimmable to 1%** via 0-10V dimming wires.

Features

- Universal **120-277VAC** Input.
- 0-10V **Dimmable**.
- 80+ **CRI** Standard, 90+ available.
- 1,284 **lumens/ft**.
- Suspension Kits Included!
- High Quality Look and Build.
- Made in the **USA** Quick Ship!
- **UL-Listed**.

Typical Lumen Table

Product Size	HO	UHO
2ft	2,166 LM / 29W	4,332 LM / 58W
4ft	4,152 LM / 55W	8,303 LM / 110W
6ft	6,137 LM / 81W	12,274 LM / 162W
8ft	8,123 LM / 108W	16,245 LM / 215W

*Based on standard sizes with 4000K Color Temperature

Specifications

*[XX] denotes color temperature

Part#	LVLBP43-XX-YY-ZZ
Sizes	2ft, 4ft, 6ft, 8ft, Custom
Input Voltage	120-277 VAC
Light Output	HO: 1,083 Lumens/ft UHO: 2,166 Lumens/ft
Efficiency	76 Lumens/Watt
Color Rendering	>80 (CRI over 90 available)
Environment	Dry or Damp Location
Warranty	5-Year
Lifetime	50,000-70,000+ Hours
Listings	UL-Listed
Dimming	0-10V Dimmable, Phase/TRIAC
Light Distribution	Down Light

Available Colors



3000K
Warm White



4000K
Natural White



5000K
Bright White



RGB + 2700K
Color Changing + Warm White



RGB + 5000K
Color Changing + Bright White



CCT 2700K - 5000K
Tunable White

*Custom Available Upon Request

Finish Options

Standard



Satin Aluminum

Custom




Ruby Red
RAL #3003



Traffic Yellow
RAL #1023




Bright Orange
RAL #2009



Island Skye
RAL #6027




Beige
RAL #1001








Sky Blue
RAL #5015

*Extended lead times for custom RAL finishes. Any RAL color can be selected in addition to the one shown


Light Distribution



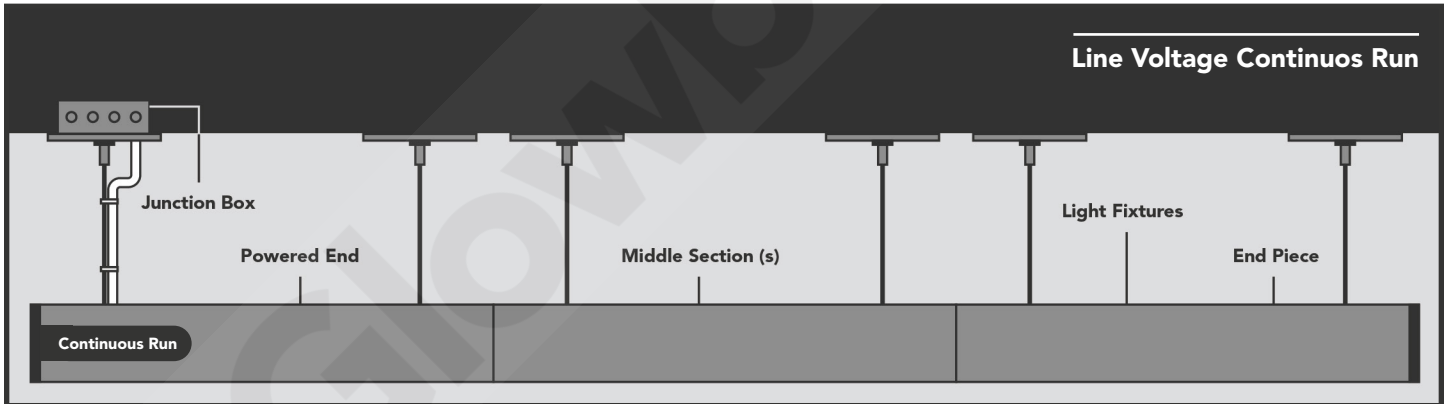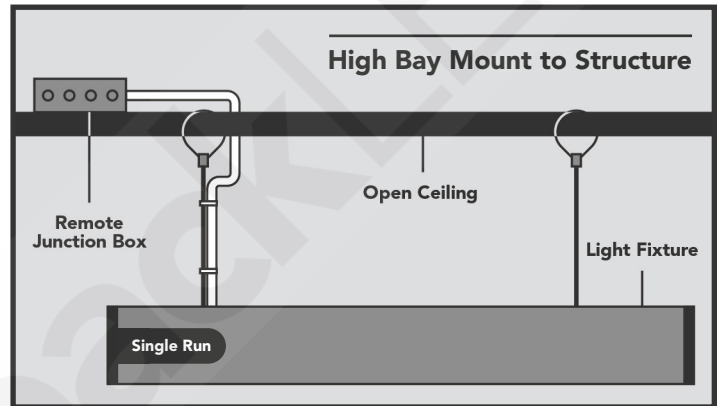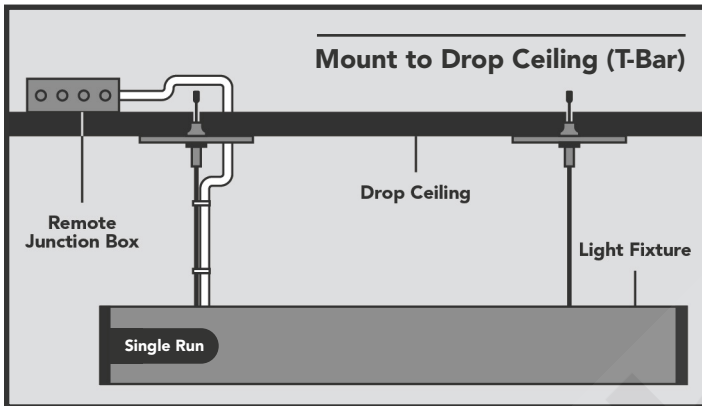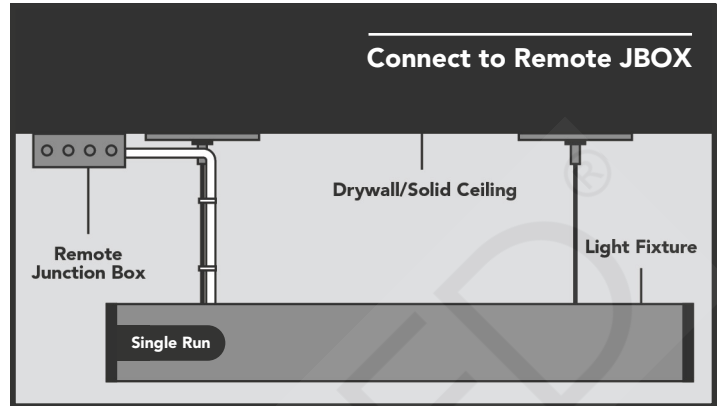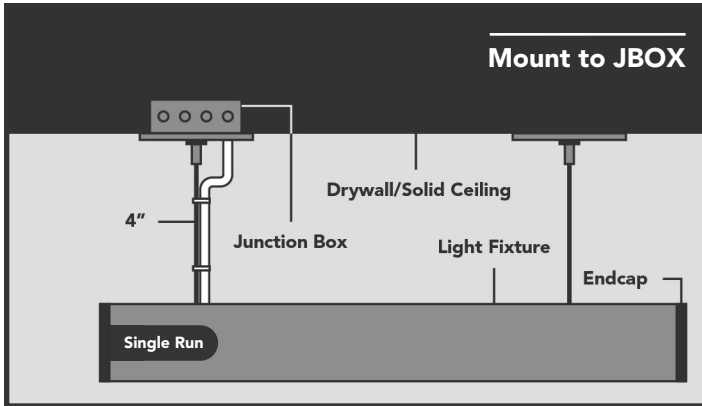

Standard Shapes




Custom Shapes

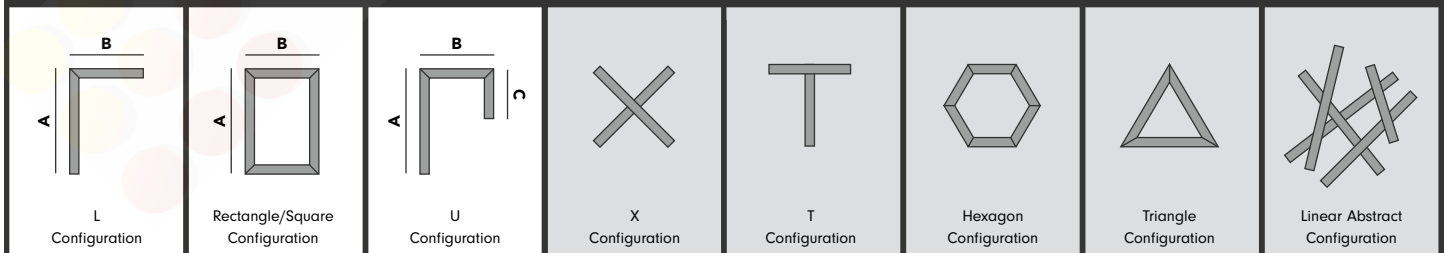

*More custom shapes are available upon request

Master Product Code Builder

Prefix	LVLB
Profile	P43
Finish	
Satin Aluminum	leave blank
Matte Black	N/A
Matte White	N/A
Custom	C
Output	
1,083 Lumens/ft	HO
2,166 Lumens/ft	UHO
Size	
2ft	24
4ft	46
6ft	68
8ft	90
Custom	enter in inches
Continuous	CR
Custom Shape	CS
Color	
3000K	WW
4000K	NW
5000K	BW
Custom	enter CCT value
RGB+5000K	RGBW
RGB+2700K	RGBWW
Tunable White	CCT
CRI	
80+	leave blank
90+	90
95+	95
Mount Type	
Mount to JBOX	A
Remote JBOX	B
Drop Ceiling	C
High Bay	D
Voltage	
120-277VAC	leave blank
347VAC	347
Dimming/Control	
0-10V	leave blank
Phase/TRIAC	TRIAC
DMX	DMX
Emergency	
None	leave blank
EM Back Up	EM* 4ft min for EM
Run Type	
Single	leave blank
C/R Powered End	CRP
C/R Middle	CRM
C/R End Piece	CRE
NA	leave blank
Shapes	
NA	leave blank
Standard Shape	S/S
Custom Shape	C/S

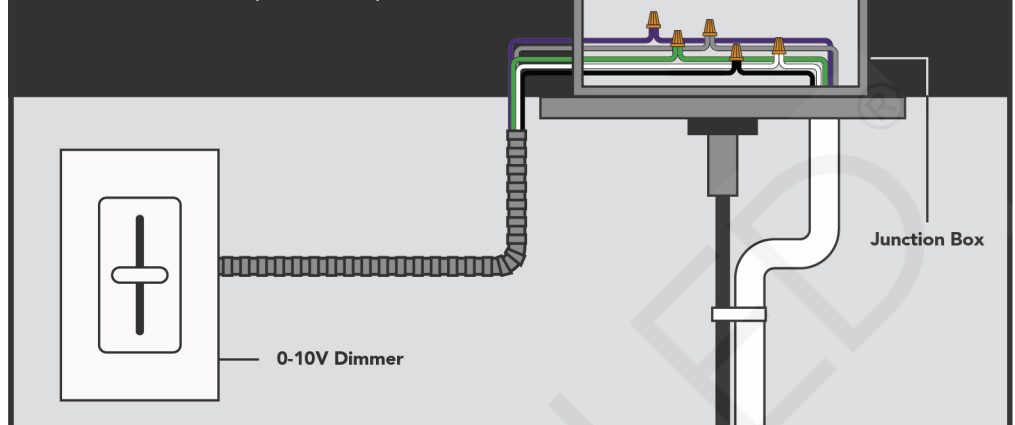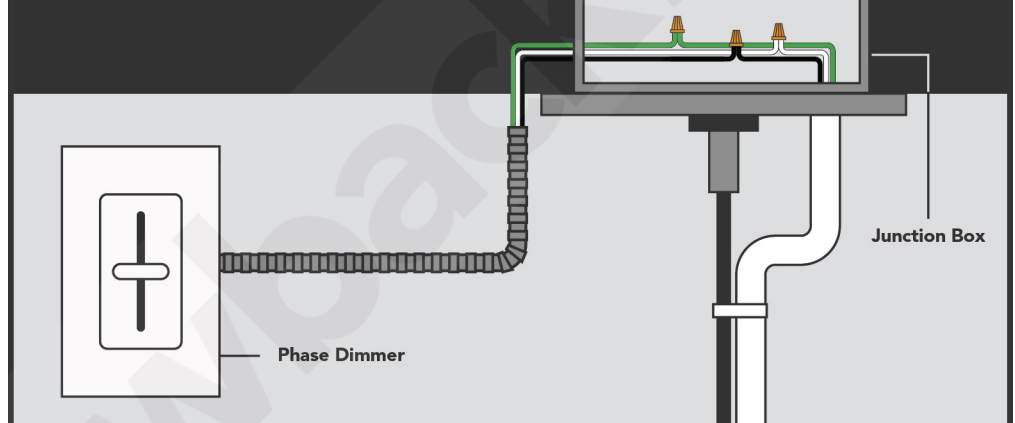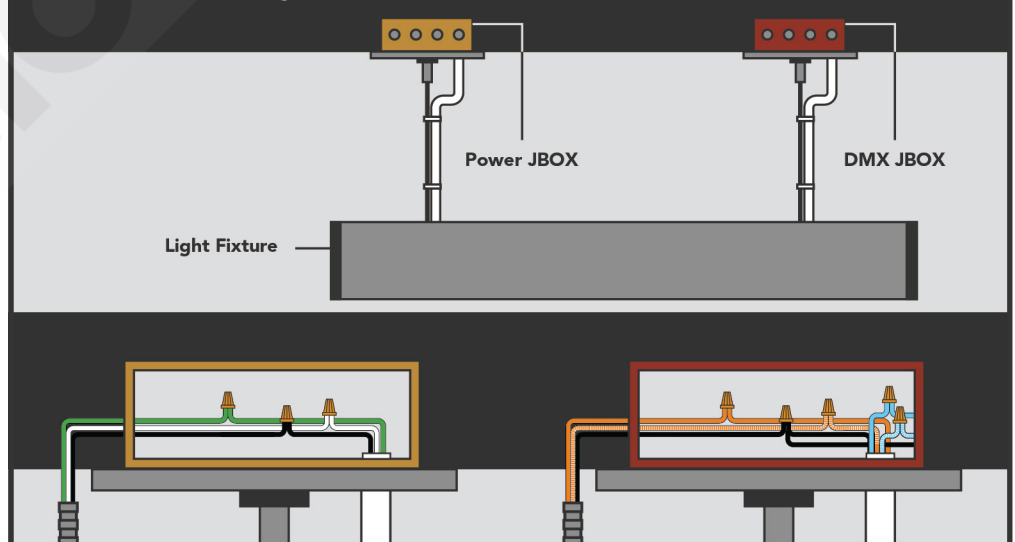0-10V Dimmable (Standard)

Phase/Triac Dimmable

DMX Control Configuration


Project Name

Ordering Form

[illegible]

Custom Configuration Notes