


Linear LED Fixture Spec Sheet

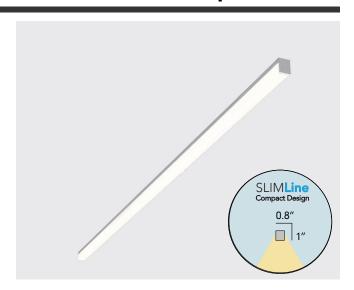


Our LVLBP is a slim and attractive surface mounted linear light fixture available in custom sizes and configurations ranging from 2-8ft in length. Easily mount to almost any desired surface using a variety of different mounting methods. Its **slim** and sleek body make this fixture a perfect solution for use in retail stores, conference rooms, residences, and hotels. Use this fixture to modernly illuminate your desired projects!


Features

- 12-24VDC Input.
- 0-10V Dimmable.
- 80+ CRI Standard, 90+ available.
- 605 or 1,100 lumens/ft.
- Suspension Kits Included!
- Waterproof Available Upon Request.
- Made in the **USA** Quick Ship!
- **UL-Listed**.

Typical Lumen Table							
Product Size	SO						
2ft	794 LM / 10W						
4ft	1,520 LM / 19W						
6ft	2,247 LM / 28W						
8ft 2,974 LM / 36W							
*Based on standard sizes with 4000K Color Temperature							

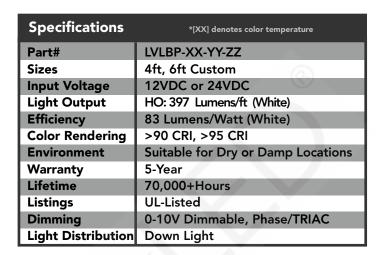



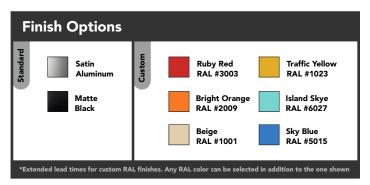




Bluegate Inc. GlowbackLED® 1173 NW 159th Drive Miami Gardens, FL 33169 1-800-679-4902 • info@bluegateinc.com













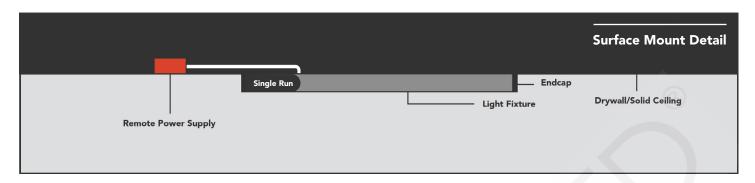


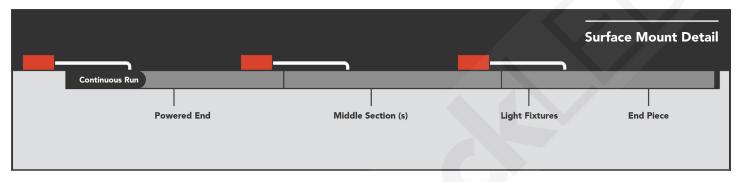

*Remote Power Supplies MUST be left accessible, they cannot be installed behind finished ceilings.






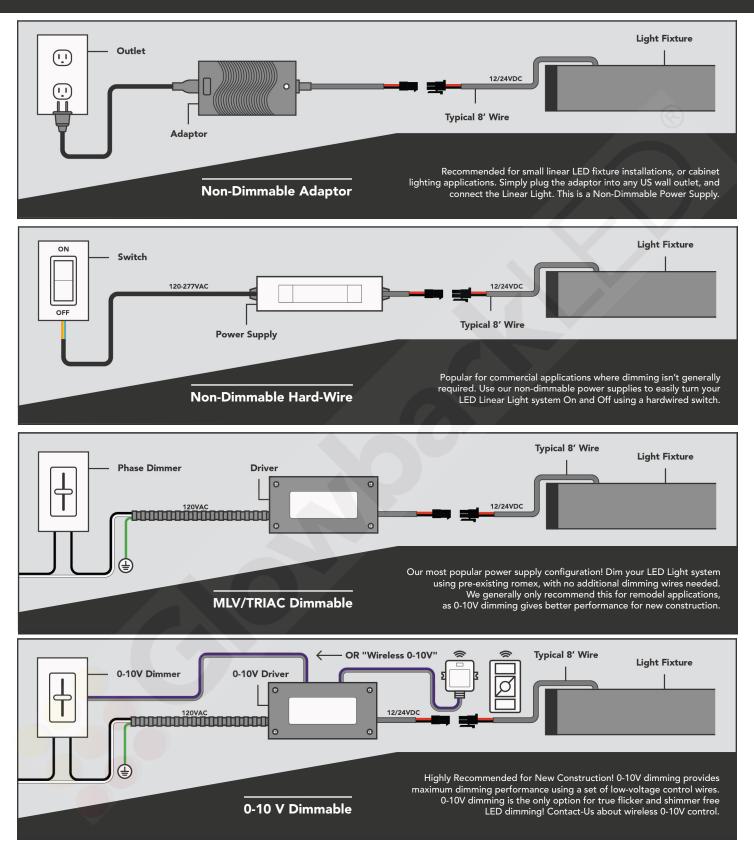


All of our LED Panels require a remote power supply and/or controller to operate. Seamlessly integrate our LED Panel systems with any type of home or building automation system. Unless otherwise specified, all LED Panel systems, including power supplies and controllers are shipped to you pre-configured, to facilitate installation. Power-Supplies will come "rigged" with connectors to match the connectors coming off the LED panels. When ordering, simply give us some details about the level of control that you want, and our team will design a turn-key control system fit to meet your needs.





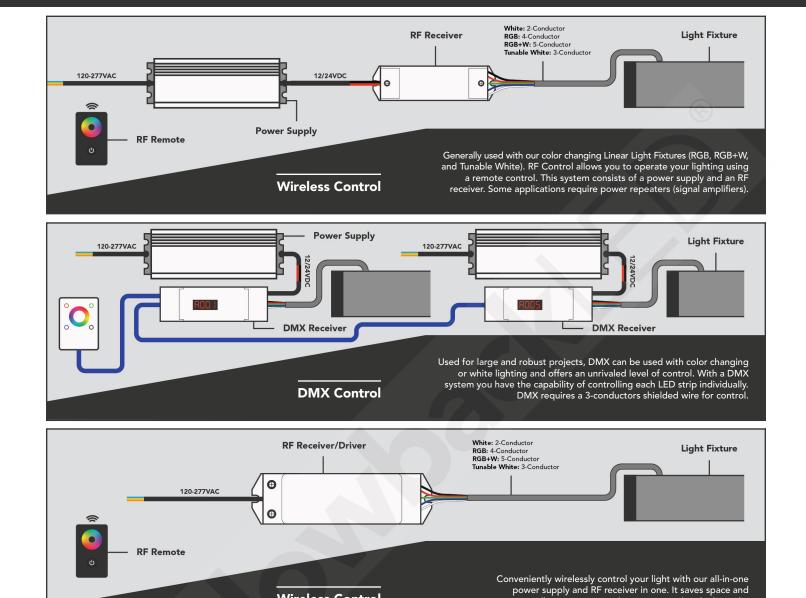

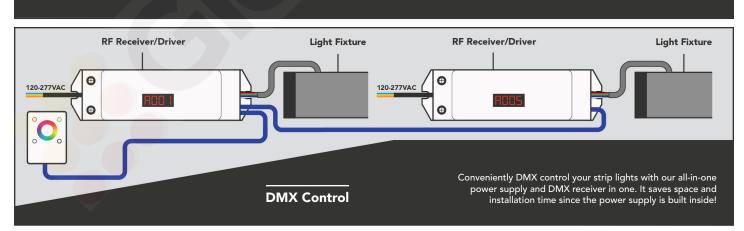

Wireless Control

All of our LED Panels require a remote power supply and/or controller to operate. Seamlessly integrate our LED Panel systems with any type of home or building automation system. Unless otherwise specified, all LED Panel systems, including power supplies and controllers are shipped to you pre-configured, to facilitate installation. Power-Supplies will come "rigged" with connectors to match the connectors coming off the LED panels. When ordering, simply give us some details about the level of control that you want, and our team will design a turn-key control system fit to meet your needs.





installation time since the power supply is built inside!





Master Produc	t Code Builder
Prefix	LVLB
Profile	РВ
Finish	
Satin Aluminum	leave blank
Matte Black	BLK
Matte White	N/A
Custom	c
Output	
N/A	SO
397 Lumens/ft	но
Size	
2ft	24
4ft	46
6ft	68
8ft	90
Custom	enter in inches
Continous	CR
Custom Shape	CS
Color	
2300K	AW
2700K	IW
3000K	ww
4000K	NW
6000K	BW
Custom	enter CCT value
RGB+6000K	RGBW
RGB+2700K	RGBWW
Tunable White	CCT
CRI	CCI
80+	80
90+	90
Mount Type	70
Surface	S
Juriace	,
Voltage	
Voltage 12VDC	leave blank
24VDC	24
Dimming/Control	44
0-10V	leave blank
Phase/TRIAC	
DMX	TRIAC
	PINIV
Run Type	Janua blank
Single	leave blank CRP
C/R Powered End	
C/R Middle	CRM
C/R End Piece	CRE
NA	leave blank
Shapes	La contract
NA Standard Shane	leave blank
Standard Shape	S/S
Custom Shape	C/S



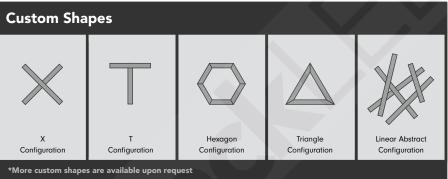

Non-Dimmable Adaptor	24V 36W	24V36WAPT	
	24V 60W	24V60WAPT	
Non-Dimmable Hardwire	24V 36W	24V36WHOD	
	24V 96W	24V4ALP13	
Phase Dimmable	24V 30W	MUD24V30W	
	24V 60W	MUD24V60W	
	24V 96W	MUD24V96W	
	24V 192W (2 x 96W)	MUD24V192W	
	24V 288W (3 x 96W)	MUD24V288W	
0-10V/Triac Dimmable (All-in-One)	24V 60W	M01024V60W	
	24V 96W	M01024V96W	
	24V 192W (2 x 96W)	M01024V192W	
	24V 288W (3 x 96W)	M01024V288W	
	24V 384W (4 x 96W)	M01024V384W	
Non-Dimmable Hardwire for RF/DMX	24V 96W MeanWell	MWHLG100H24A	
	24V 150W* MeanWell	MWHLG150H24A	
RF Receiver and Remotes	RF Receiver (12-24V Input)	BG1009FA	
	Power Repeater (12-24V Input)	BG3002	
DMX Receivers	DMX Receiver (12-24V Input)	BG2108FA-4CH	
	DMX Receiver (12-24V Input) w/ XLR and RJ45 Connectors	BG2108A-M5-5	
All-In-One Built in Power Supply Receivers	RF Receiver (100-277VAC Input) 96W	BG1009FA-96CVF-24	
	DMX Receiver (100-277VAC Input) 96W	BG2108-96CVF-24	
DMX Controllers	Single Zone RGB/RGBW Touch Panel	BG2812B	
	3-Zone RGB/RGBW Touch Panel	BG2812-3(W)	
	Programmable Single Zone Nicolaudie Stick GU2	STICKGU2	
	Programmable Single Zone Nicolaudie Stick CW4	STICKCW4	
	Programmable 10 Zone Nicolaudie Stick DE3	STICKDE3	





Project Name		

Ord	ering Fo	rm											
QTY	LVLBP	Finish	Output	Size	Color	CRI	Mount Type	Voltage	Dimming/Control	Emergency	Run Type	Shapes	Project Fixture Type
	LVLBP	BLK	50	90	ww	90	Α						ST-5
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												
	LVLBP												

Custom Configuration Notes		