


Linear LED Fixture Spec Sheet

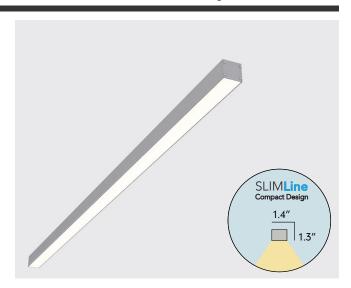


Our LVLBV2 is an attractive and slim surface mounted linear light fixture available in custom sizes ranging from 2-8ft in length. Easily mount to almost any surface using different custom fastening methods. The slim and sleek body of our LVLBV2 has an attractive finish that is capable of producing high output led lighting, making it perfectly suitable for use in offices, retails stores, conference rooms, residences, and hotels.


Features

- 12-24VDC Input.
- Dimmable (Pair with Dimmable Driver).
- 90+ CRI Standard, 95+ available.
- 500 lumens/ft.
- Suspension Kits Included!
- Waterproof Available Upon Request.
- Made in the **USA** Quick Ship!
- **UL-Listed**.

Typical Lumen Table							
Product Size	SO	НО					
2ft	246 LM / 5W	472 LM / 10W					
4ft	472 LM / 10W	905 LM / 19W					
6ft	697 LM / 14W	1,338 LM / 28W					
8ft	922 LM / 19W	1,770 LM / 37W					
*Based on standard sizes with 4000K Color Temperature							

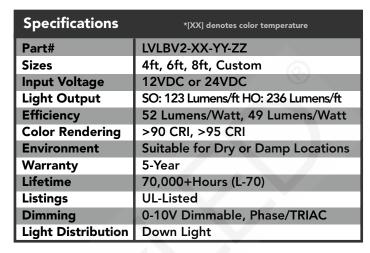



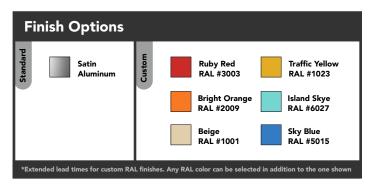




Bluegate Inc. GlowbackLED® 1173 NW 159th Drive Miami Gardens, FL 33169 1-800-679-4902 • info@bluegateinc.com















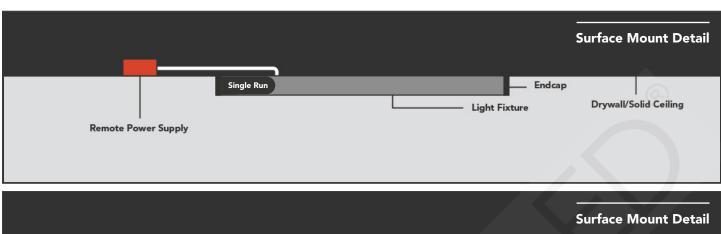

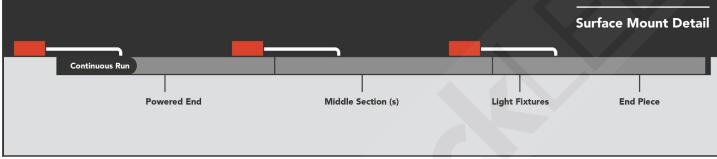


*Remote Power Supplies MUST be left accessible, they cannot be installed behind finished ceilings.







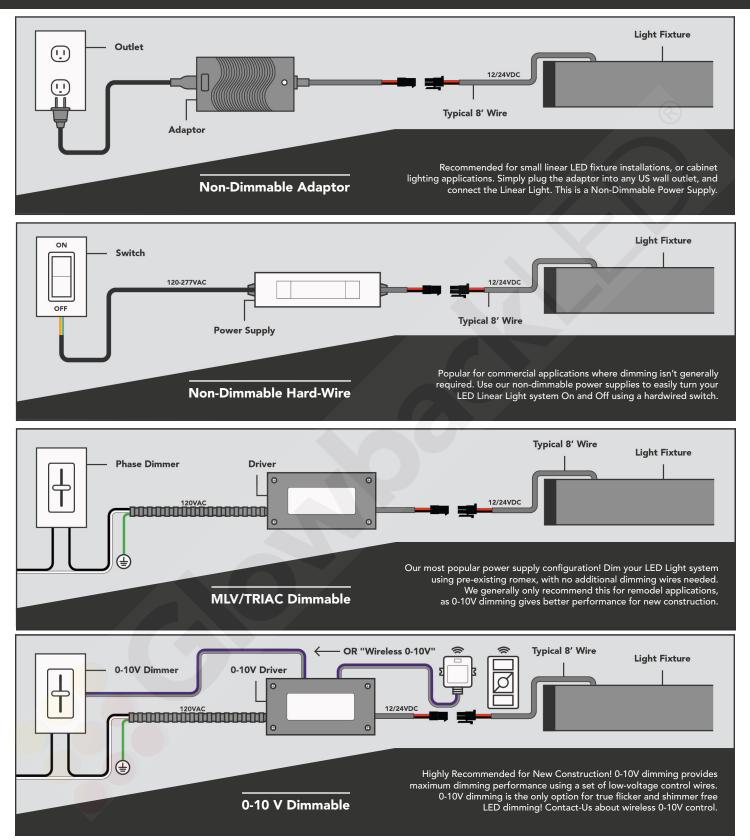



All of our LED Panels require a remote power supply and/or controller to operate. Seamlessly integrate our LED Panel systems with any type of home or building automation system. Unless otherwise An of our LED I aries require a remove power supply allow controller to operate. Seamless in integrate our LED I aries require a remove power supplier and controllers are shaped to you pre-configured, to facilitate installation. Power-Suppliers will come "rigged" with connectors to match the connectors coming off the LED panels. When ordering, simply give us some details about the level of control that you want, and our team will design a turn-key control system fit to meet your needs.







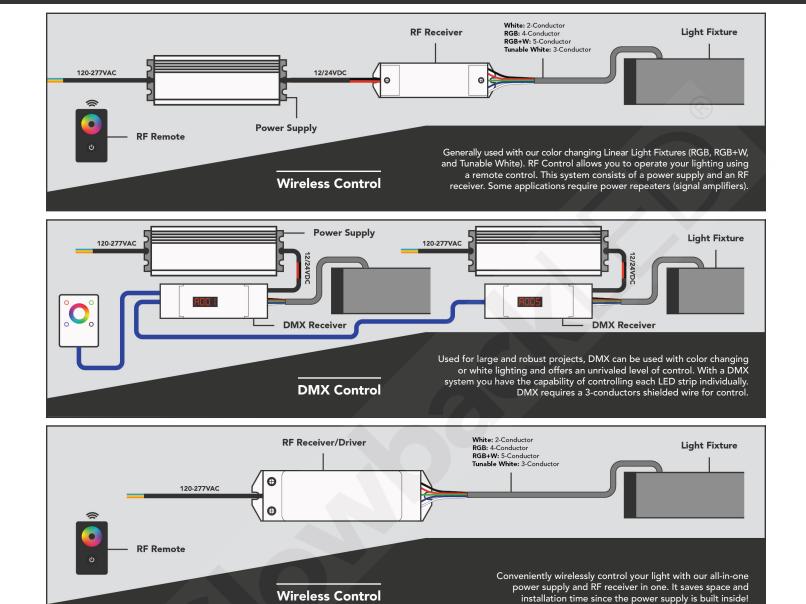

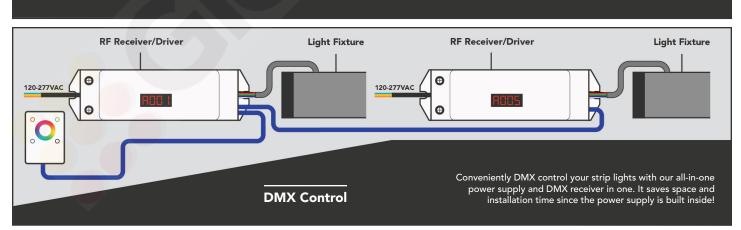


All of our LED Panels require a remote power supply and/or controller to operate. Seamlessly integrate our LED Panel systems with any type of home or building automation system. Unless otherwise specified, all LED Panel systems, including power supplies and controllers are shipped to you pre-configured, to facilitate installation. Power-Supplies will come "rigged" with connectors to match the connectors coming off the LED panels. When ordering, simply give us some details about the level of control that you want, and our team will design a turn-key control system fit to meet your needs.








Master Product Code Builder						
Prefix	LVLB					
Profile	V2					
Finish						
Satin Aluminum	leave blank					
Matte Black	N/A					
Matte White	N/A					
Custom	С					
Output						
123 Lumens/ft	SO					
236 Lumens/ft	НО					
Size						
2ft	24					
4ft	46					
6ft	68					
8ft	90					
Custom	enter in inches					
Continous	CR					
Custom Shape	CS					
Color						
2300K	AW					
2700K	IW					
3000K	ww					
4000K	NW					
6000K	BW					
Custom	enter CCT value					
	RGBW					
RGB+6000K RGB+2700K	RGBWW					
	CCT					
Tunable White	CCI					
CRI	00					
80+	80 90					
90+	90					
Mount Type						
Surface	S					
Voltage						
12VDC	leave blank					
24VDC	24					
Dimming/Control						
0-10V	leave blank					
Phase/TRIAC	TRIAC					
DMX	DMX					
Run Type						
Single	leave blank					
C/R Powered End	CRP					
C/R Middle	CRM					
C/R End Piece	CRE					
NA						
Shapes	leave blank					
NA	leave blank leave blank					



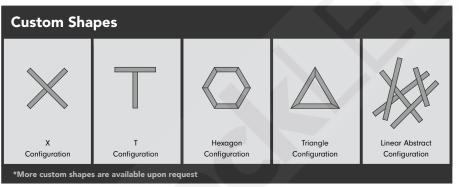

Non-Dimmable Adaptor	24V 36W	24V36WAPT	
	24V 60W	24V60WAPT	
Non-Dimmable Hardwire	24V 36W	24V36WHOD	
	24V 96W	24V4ALP13	
Phase Dimmable	24V 30W	MUD24V30W	
	24V 60W	MUD24V60W	
	24V 96W	MUD24V96W	
	24V 192W (2 x 96W)	MUD24V192W	
	24V 288W (3 x 96W)	MUD24V288W	
0-10V/Triac Dimmable (All-in-One)	24V 60W	M01024V60W	
	24V 96W	M01024V96W	
	24V 192W (2 x 96W)	M01024V192W	
	24V 288W (3 x 96W)	M01024V288W	
	24V 384W (4 x 96W)	M01024V384W	
Non-Dimmable Hardwire for RF/DM)	24V 96W MeanWell	MWHLG100H24A	
	24V 150W* MeanWell	MWHLG150H24A	
RF Receiver and Remotes	RF Receiver (12-24V Input)	BG1009FA	
	Power Repeater (12-24V Input)	BG3002	
DMX Receivers	DMX Receiver (12-24V Input)	BG2108FA-4CH	
	DMX Receiver (12-24V Input) w/ XLR and RJ45 Connectors	BG2108A-M5-5	
All-In-One Built in Power Supply Receiver	RF Receiver (100-277VAC Input) 96W	BG1009FA-96CVF-2	
	DMX Receiver (100-277VAC Input) 96W	BG2108-96CVF-24	
DMX Controllers	Single Zone RGB/RGBW Touch Panel	BG2812B	
	3-Zone RGB/RGBW Touch Panel	BG2812-3(W)	
	Programmable Single Zone Nicolaudie Stick GU2	STICKGU2	
	Programmable Single Zone Nicolaudie Stick CW4	STICKCW4	
	Programmable 10 Zone Nicolaudie Stick DE3	STICKDE3	





Project Name		

Orde	ering Fo	rm											
QTY	LVLBV2	Finish	Output	Size	Color	CRI	Mount Type	Voltage	Dimming/Control	Emergency	Run Type	Shapes	Project Fixture Type
	LVLBV2	BLK	50	90	ww	90	А						ST-5
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												
	LVLBV2												

Custom Configuration Notes		