

Product Overview



BG2108A-M5-5
Spec Sheet

DMXPRO



Our new **BG2108A-M5-5 DMXPRO** Receiver, is an **architectural grade** DMX512 & RDM Decoder capable of supporting universal DMX protocols. With integrated RDM capabilities, our **DMXPRO** Decoder allows one to re-address the decoder using an RDM capable controller or the digital display buttons. In order to achieve the best solution for the desired project, choose from different setting options including PWM output frequency, PWM output resolution, and selecting dimming curves. Conveniently send DMX signal to numerous receivers using integrated RJ45, XLR, or screw-in ports. Our **DMXPRO** Decoder is capable of handling up to **5 channels**, offering unmatched versatility and premium quality to achieve vivid color changing lighting projects with customized controls.


Quick Specs

Product Code	BG2108A-M5-5
Dimensions	6.5" L 2.9" W 1.5" H
Wiring Terminals	DMX512, RJ-45, XLR, Wire-in
Input Voltage	12-24VDC
Channels	5 Channels, 8A Per Channel
Output Power	5X 96-288W PWM Control
Warranty	3-Year Limited Warranty
Environment	Indoor/Damp Location
Listings	UL Recognized Component

Features

- **Digital Display**
- **5x 8A Channels**
- **Multiple Dimming Curve** Settings Available
- **Male and Female** 3/5 Pin XLR DMX512 input and output ports
- **Compatible with** White, RGB, RGB+W, Tunable White, and RGB+Tunable White Lighting
- Set Linear or Logarithmic Dimming
- **Bi-Directional** Communication (RDM)
- Optional adjustable decoding modes

Wiring Diagram

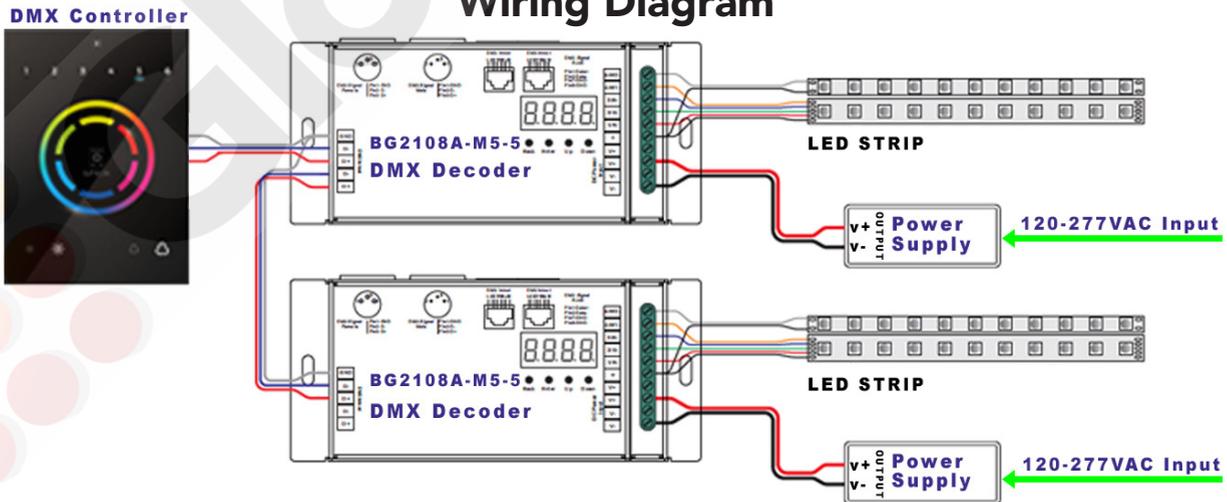

GlowbackLED®
16409 NW 8th Ave
Miami Gardens, FL 33169
1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc
©2018 Bluegate Inc. All Rights Reserved
Specifications subject to change without notice

