

Product Overview




LVLBP8-XX-YY

Suspended LED Bar P8 Spec Sheet



Available Colors

2200K Amber White	2700K Incandescent White
3000K Warm White	4500K Natural White
6500K Bright White	RGB Color Changing
RGB+W Color Changing+White	CCT Tunable White



Our Slimline **LVLBP8** is a 3" wide Linear Suspended LED Fixture is a high output linear light source suitable for general lighting applications. The included suspension cables and wide modern profile allow for a wide variety of lighting applications, ranging from use in industrial or warehouse lighting, to use in a home garage or office.

Conveniently choose from a wide variety of colors, and custom sizes up to 96" in order to obtain fully personalized lighting that is tailored to your desired lighting applications.

Features

- Tailor Made to Your Specs! Achieve a high-end, modern look and feel in your space.
- Available in full range of White color temperatures, RGB (Color Changing), RGB+W (Color Changing and White), and Tunable White.
- Standard >90 CRI, CRI>95 available!
- Easily Install using provided mounting hardware
- Dimmable (Pair with Dimmable Driver)
- Ultra Long Lifetime (70,000+ Hours)
- UL-Listed

Quick Specs

Part #	LVLBP8-XX-YY-ZZ		
Sizes	2ft, 4ft, 6ft, 8ft (Custom Sizes Available)		
Power Output	Power Output Per Strip		
	5W/ft S/O White	3.5W/ft RGB	
	12W/ft H/O White	6W/ft RGB+W/CCT	
Light Output	350 lumens/ft (Standard-Output White) 900 lumens/ft (High-Output White)		
Efficiency	70 lumens/Watt (Standard-Output White) 75 lumens/Watt (High-Output White)		
Lifetime	70,000+ Hours (L-70)		
Environment	Suitable for Dry or Damp Locations (Waterproof Available Upon Request)		

Advanced Fixture Specs (For White)

Fixture Size	Part #	Net Size	Wattage	Lumen Output
2ft	LVLBP8-SO-24-XX	24"	10	700
4ft	LVLBP8-SO-48-XX	48"	20	1,400
6ft	LVLBP8-SO-72-XX	72"	30	2,100
8ft	LVLBP8-SO-94-XX	94"	40	2,800
2ft	LVLBP8-HO-24-XX	24"	24	1,800
4ft	LVLBP8-HO-48-XX	48"	48	3,600
6ft	LVLBP8-HO-72-XX	72"	72	5,400
8ft	LVLBP8-HO-94-XX	94"	90	7,200

XX= Color Temp Code (WW=Warm White 3000K, NW=Natural White 4000K, BW= Bright White 6000K)

GlowbackLED®
16409 NW 8th Ave
Miami Gardens, FL 33169
1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc
©2019 Bluegate Inc. All Rights Reserved
Specifications subject to change without notice








Product Overview




LVLBP8-XX-YY Suspended LED Bar P8 Spec Sheet

Mounting Configurations

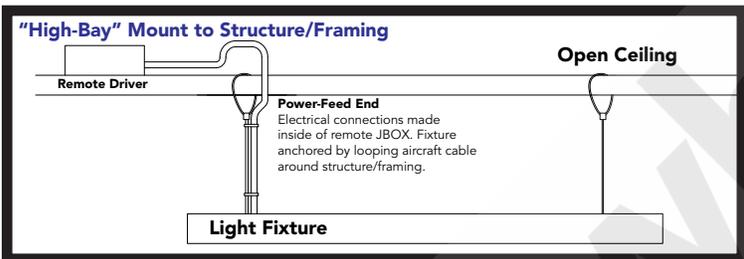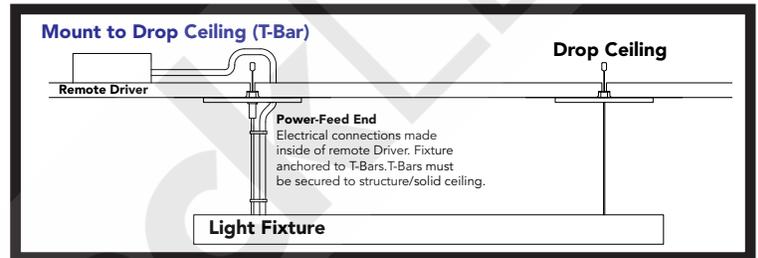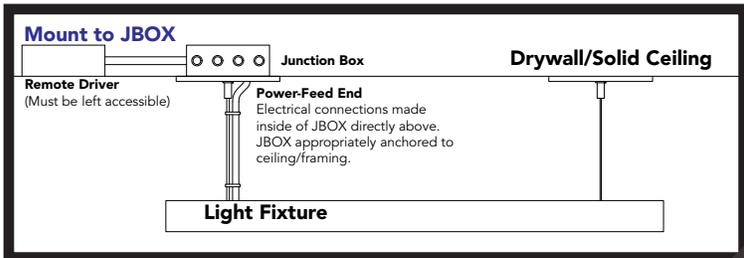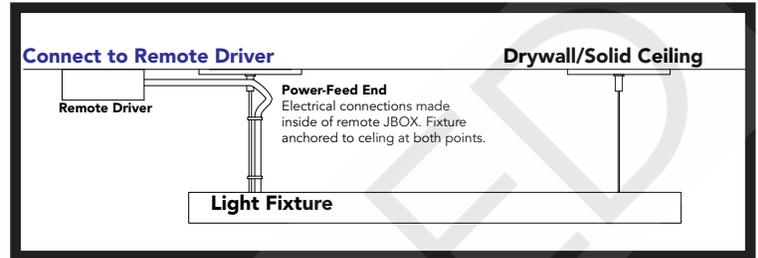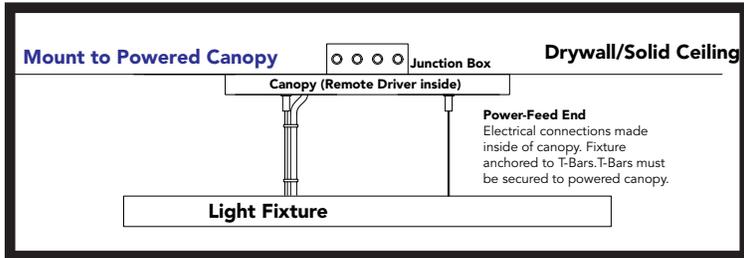

Continuous Runs

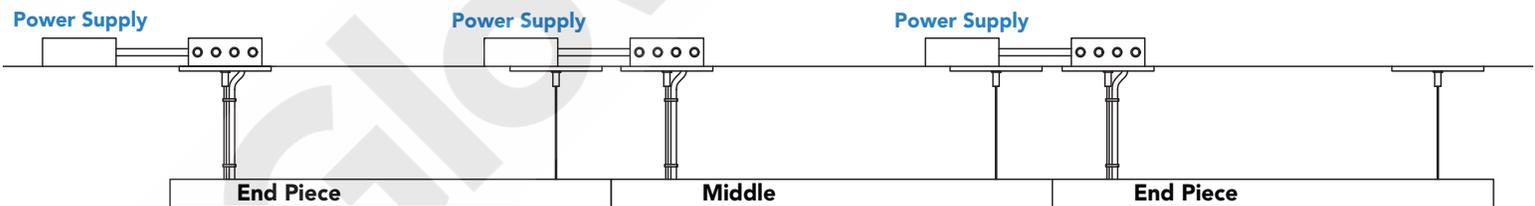

Note: When ordering a continuous run, specify the overall length of run needed. One of our project managers can specify the correct configuration. Continuous runs are "linkable" and consist of (2) end sections, and as many "middle" sections as needed to achieve the run.

Input Voltage	- LVLB -	Output	- P8 -	Custom Size	-	CRI	-	Color	-	Power Feed Length	-	Mount Type
12V 24V		II: Standard (<3W/ft) III: RGB+W/CCT Only (<6W/ft) IV: High-Output White (>12W/ft)		enter size in inches		CRI>90 Standard CRI>95 High-Output		AW: 2300K IW: 2700K WW: 3000K NW: 4000K BW: 6000K Custom (MOQ/+2 Weeks)	RGB RGB+W: 6500K RGB+WW: 3000K CCT: 2700K-6000K	Standard: 8ft Custom Size: enter size in inches		Mount To: Powered Canopy JBOX Structure/Framing (High Bay) Remote Driver Drop Ceiling (T-Bar)

GlowbackLED®
16409 NW 8th Ave
Miami Gardens, FL 33169
1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc
©2019 Bluegate Inc. All Rights Reserved
Specifications subject to change without notice

