


# Product Overview



**LVLBR2.3-XX-YY-ZZ**  
LVLBR2.3 Spec Sheet

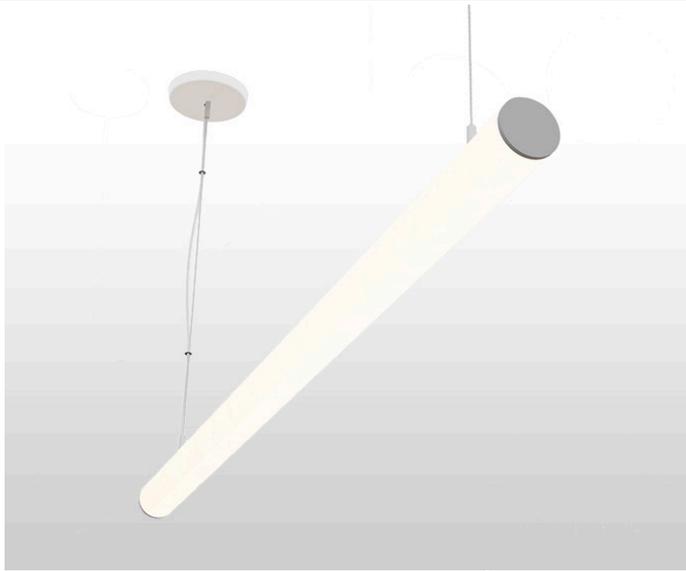

For an abstract yet modern finish in today's lighting applications, our **LVLBR2.3** is a perfect solution. With a 2.3" diameter, **LVLBR2.3** is slim enough for use in almost any application, and the premium white rounded lens adds a decorative and modern touch to any lighting application while achieving an evenly diffused wrap around effect. This highly versatile light fixture adds character to office spaces, classrooms, conference rooms and more! Suspend from any ceiling type to add a flare of decorative and modern linear lighting to your space. Available in lengths up to 96", order today to bring a modern abstract design to your projects!


## Features

- Tailor Made to Your Specs! Achieve a high-end, modern look and feel in your space.
- Available in full range of White color temperatures, RGB (Color Changing), RGB+W (Color Changing and White), and Tunable White.
- Standard >90 CRI, CRI>95 available!
- Easily Install using provided mounting hardware
- Dimmable (Pair with Dimmable Driver)
- Ultra Long Lifetime (70,000+ Hours)
- UL-Listed

### Available Colors

<b>2200K</b> Amber White	<b>2700K</b> Incandescent White
<b>3000K</b> Warm White	<b>4500K</b> Natural White
<b>6500K</b> Bright White	<b>RGB</b> Color Changing
<b>RGB+W</b> Color Changing+White	<b>CCT</b> Tunable White

### Dimensions



## Quick Specs

<b>Sizes</b>	Any size from 46"-96" (Linkable For Long runs)	
<b>Input Voltage</b>	12VDC or 24VDC	
<b>Power Output</b>	Power Output Per Strip	
	6W/ft White	3.5W/ft RGB
	6W/ft RGBW/CCT	
<b>Light Output</b>	624 lumens/ft (White)	
<b>Efficiency</b>	104 lumens/Watt (White)	
<b>Lifetime</b>	70,000+ Hours (L-70)	
<b>Environment</b>	Suitable for Dry or Damp Locations (Waterproof Available Upon Request)	

### Advanced Fixture Specs (For White)

Fixture Size	Part #	Net Size	Wattage	Lumen Output
4ft	LVLBR2.3-SO-46-XX	46"	24	2,496
6ft	LVLBR2.3-SO-68-XX	68"	36	3,744
8ft	LVLBR2.3-SO-90-XX	90"	48	4,992








# Product Overview




LVLBR2.3-XX-YY-ZZ

LVLBR2.3 Spec Sheet

## Mounting Configurations

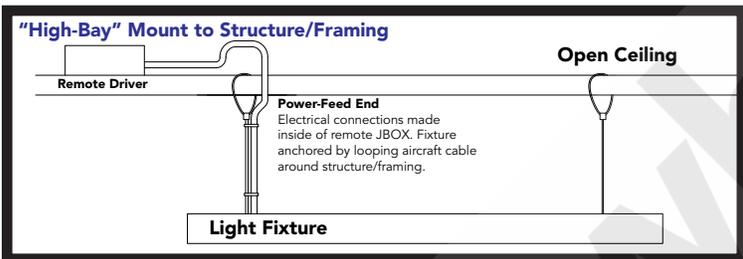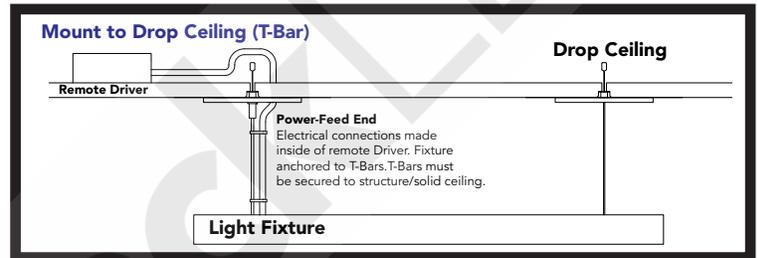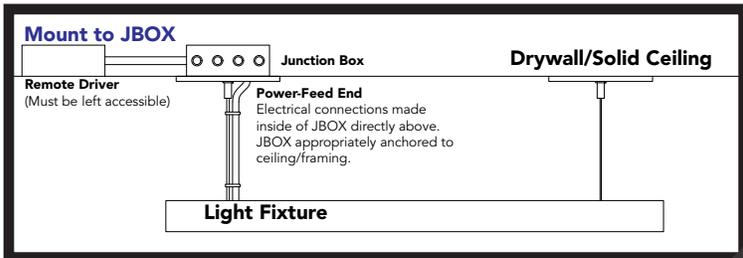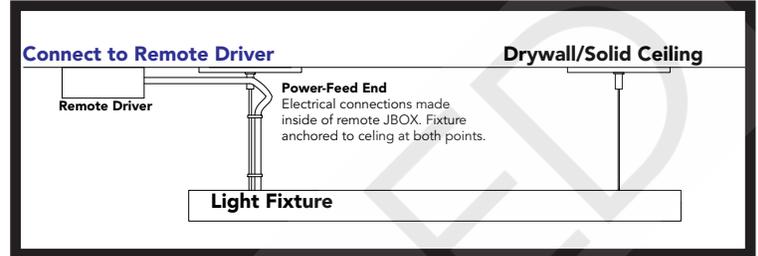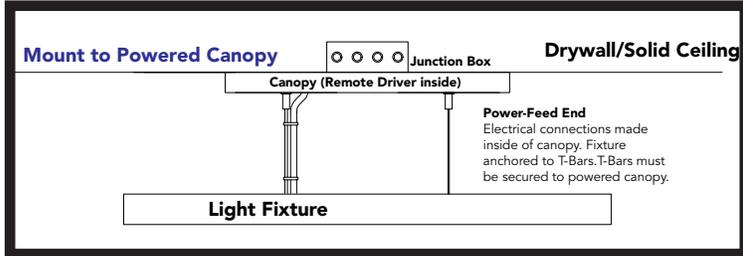

## Continuous Runs

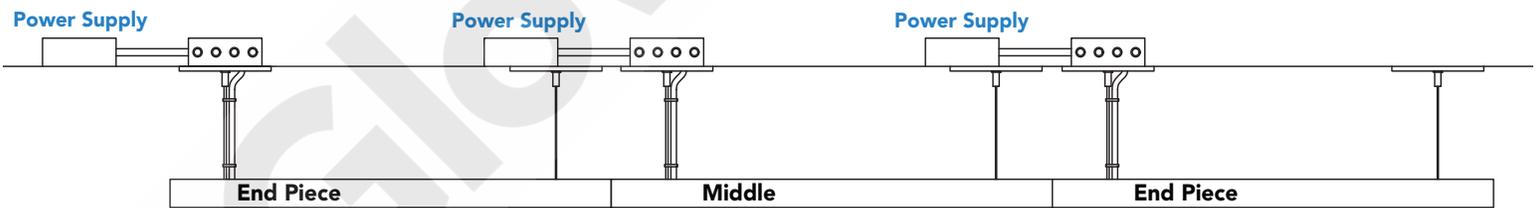

**Note:** When ordering a continuous run, specify the overall length of run needed. One of our project managers can specify the correct configuration. Continuous runs are "linkable" and consist of (2) end sections, and as many "middle" sections as needed to achieve the run.

Input Voltage - LEDBAR - Output - R2.3 - Custom Size - CRI - Color - Power Feed Length - Power Entry

12V  
24V

II: Standard (<6W/ft)  
III: RGB+W/CCT Only (<6W/ft)

enter size in inches

CRI>90 Standard  
CRI>95 High-Output

AW: 2200K  
IW: 2700K  
WW: 3000K  
NW: 4000K  
BW: 6000K  
Custom (MOQ+2Weeks)

RGB  
RGB+W: 6000K  
RGB+WW: 3000K  
CCT

Standard: 8ft  
Custom Size: enter size in inches

Entry Location:  
Rear

**GlowbackLED®**  
16409 NW 8<sup>th</sup> Ave  
Miami Gardens, FL 33169  
1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc  
©2019 Bluegate Inc. All Rights Reserved  
Specifications subject to change without notice

