

Product Overview




LVLBV2-XX-YY-ZZ
LVLBV2 Spec Sheet



Available Colors

2200K Amber White	2700K Incandescent White
3000K Warm White	4500K Natural White
6500K Bright White	RGB Color Changing
RGB+W Color Changing+White	CCT Tunable White



Our Slimline **LVLBV2** is a 1.4" sleek and narrow suspended linear LED light source suitable for general lighting applications. The included suspension cables and tall modern frosted lens achieve a modern finish and allow for use in a wide variety of lighting applications, ranging from use in industrial or warehouse lighting, to use in a home garage or office.

Conveniently choose from a wide variety of colors, and custom sizes up to 78" in order to obtain fully personalized lighting that is tailored to your desired lighting applications.

Features

- Tailor Made to Your Specs! Achieve a high-end, modern look and feel in your space.
- Available in full range of White color temperatures, RGB (Color Changing), RGB+W (Color Changing and White), and Tunable White.
- Standard >90 CRI, CRI>95 available!
- Easily Install using provided mounting hardware
- Dimmable (Pair with Dimmable Driver)
- Ultra Long Lifetime (70,000+ Hours)
- UL-Listed

Quick Specs

Sizes	Any size from 46"-78" (Linkable For Long runs)	
Input Voltage	12VDC or 24VDC	
Power Output	Power Output Per Strip	
	6W/ft White	3.5W/ft RGB
	6W/ft RGBW/CCT	
Light Output	500 lumens/ft (White)	
Efficiency	83 lumens/Watt (White)	
Lifetime	70,000+ Hours (L-70)	
Environment	Suitable for Dry or Damp Locations (Waterproof Available Upon Request)	

Advanced Fixture Specs (For White)

Fixture Size	Part #	Net Size	Wattage	Lumen Output
2ft	LVLBV2-SO-24-XX	24"	12	1,000
4ft	LVLBV2-SO-46-XX	46"	24	2,000
6ft	LVLBV2-SO-68-XX	68"	36	3,000
8ft	LVLBV2-SO-90-XX	90"	48	4,000








Product Overview




LVLBV2-XX-YY-ZZ

LVLBV2 Spec Sheet

Mounting Configurations

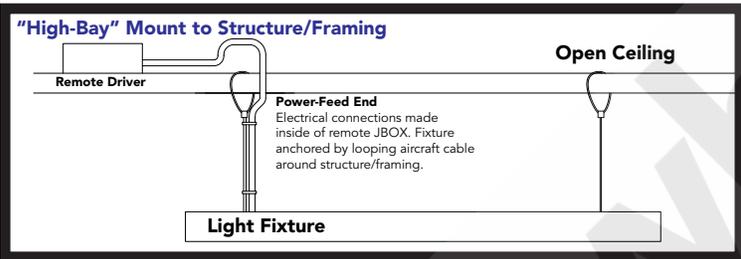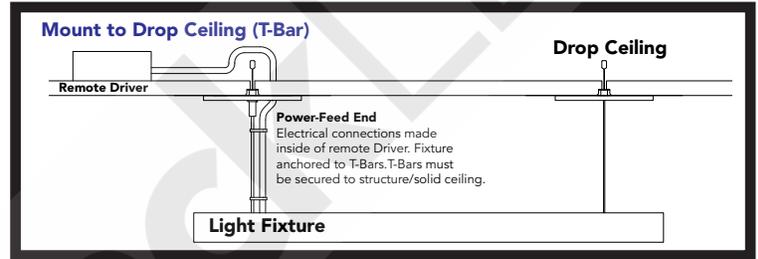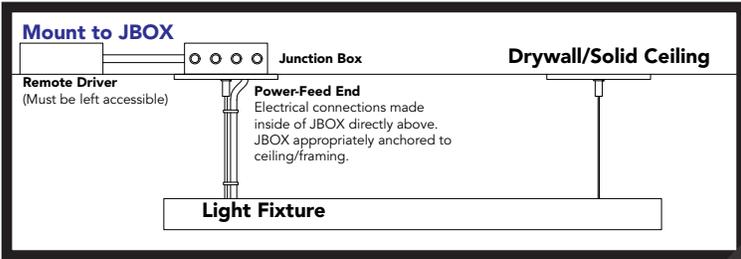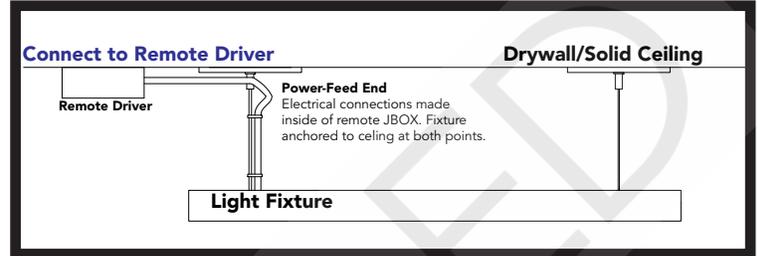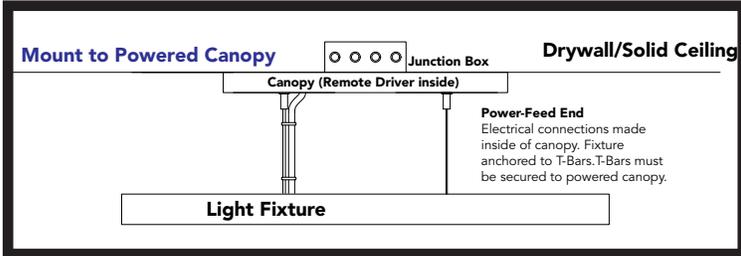

Continuous Runs

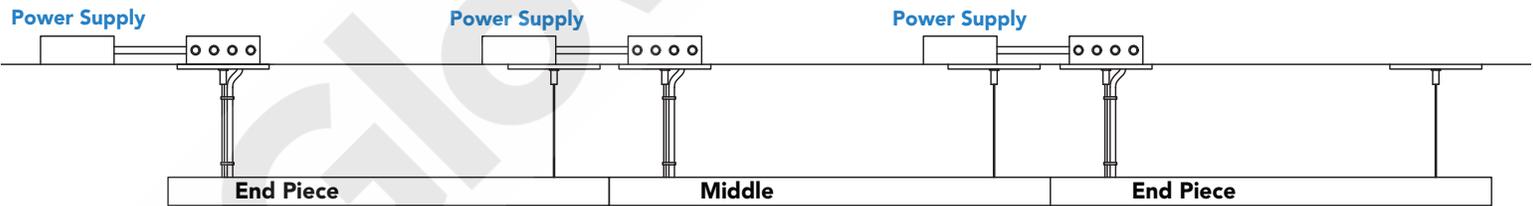

Note: When ordering a continuous run, specify the overall length of run needed. One of our project managers can specify the correct configuration. Continuous runs are "linkable" and consist of (2) end sections, and as many "middle" sections as needed to achieve the run.

Input Voltage - LEDBAR - Output - V2 - Custom Size - CRI - Color - Power Feed Length - Power Entry

12V
24V

II: Standard (<6W/ft)
III: RGB+W/CCT Only (<6W/ft)

enter size in inches

CRI>90 Standard
CRI>95 High-Output

AW: 2200K
IW: 2700K
WW: 3000K
NW: 4000K
BW: 6000K
Custom (MOQ/+2Weeks)

RGB
RGB+W: 6000K
RGB+WW: 3000K
CCT

Standard: 8ft
Custom Size: enter size in inches

Entry Location:
Rear

GlowbackLED®
16409 NW 8th Ave
Miami Gardens, FL 33169
1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc
©2019 Bluegate Inc. All Rights Reserved
Specifications subject to change without notice

