

# Linear LED Fixture Spec Sheet



LVLBP24-XX-YY-ZZ


Pendant Mounted Up/Down Light Linear Lighting



## Quick Specs

Part #	LVLBP24-XX-YY-ZZ
Sizes	4ft, 6ft, 8ft
Input Voltage	120-277VAC
Light Output	Up/Down: 360-770lu/ft
Efficiency	77 lumens/Watt
Color Rendering	>80 (CRI over 90 available)
Environment	Dry or Damp Location
Warranty	5-Year
Lifetime	50,000-70,000+ Hours
Listings	UL-Listed
Dimming	0-10V Dimmable to 1%

## Dimensions

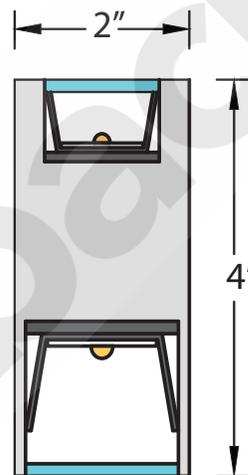

### Available Color Temperatures

3000K



Warm White

4000K



Natural White

5000K



Bright White


Our 2" x 4" Linear LED Fixture is a pendant mounted linear up-light/down-light suitable for a wide variety of residential, commercial, retail, office, and hospitality lighting applications.

It is available in **4ft, 6ft, and 8ft** sizes as one single piece. Select "**linkable**" option for seam-less continuous runs over 8ft. Choose from (3) light distribution types: Direct/Indirect (70% Down, 40% Up); Half and Half (50% Up, 50% Down), and Indirect/Direct (30% Down, 70% Up)

Conveniently select from (3) standard color temperatures best suited to your space: **3000K** (Warm White), **4000K** (Natural White), **5000K** (Bright White).

Integral driver technology allows these fixtures to accept **universal 120-277VAC** input voltage, and are **fully dimmable to 1%** via 0-10V dimming wires. Includes 8ft power and premium stainless steel suspension cable.

## Top Up-Light View

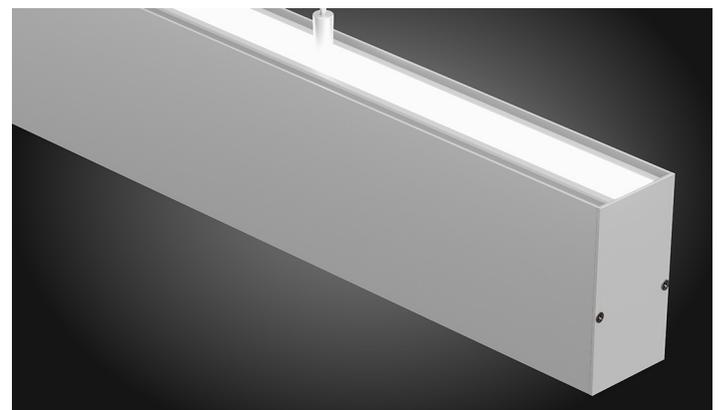

GlowbackLED®

16409 NW 8<sup>th</sup> Ave

Miami Gardens, FL 33169

1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc  
©2020 Bluegate Inc. All Rights Reserved  
Specifications subject to change without notice



# Linear LED Fixture Spec Sheet



**LVLBP24-XX-YY-ZZ**

Pendant Mounted Up/Down Light Linear Lighting

## Light Distribution

- Direct/Indirect (70% Down, 30% Up)
- Half/Half (50% Up, 50% Down)
- Indirect/Direct (30% Down, 70% Up)
- Batwing Add-On (Up-Light Only)

## Mount Type

### Select Ceiling Type:

- A** Drywall/Solid mount to JBOX
- B** Drywall/Solid to remote JBOX
- C** Drop Ceiling mount to T-Bar
- D** High Bay mount to Structure

## Run Type

### Single Run:

2ft 4ft 6ft 8ft 12ft 16ft

### Continuous Run:

Powered End Center End

## Detailed Product Specs

Fixture Size	Part #	Net Size	Wattage	Lumen Output (DWN)	Lumen Output (UP)
4ft	LVLBP24-DI-46-XX	46"	62	4,386	1,880
6ft	LVLBP24-DI-68-XX	68"	94	6,579	2,820
8ft	LVLBP24-DI-90-XX	90"	125	8,772	3,760
4ft	LVLBP24-HH-46-XX	46"	62	3,132	3,132
6ft	LVLBP24-HH-68-XX	68"	94	4,698	4,698
8ft	LVLBP24-HH-90-XX	90"	125	6,264	6,264
4ft	LVLBP24-ID-46-XX	46"	62	1,880	4,386
6ft	LVLBP24-ID-68-XX	68"	94	2,820	6,579
8ft	LVLBP24-ID-90-XX	90"	125	3,760	8,772

**DI:** Direct/Indirect (70% Down, 30% Up) | **HH:** Half and Half (50% Up, 50% Down) | **ID:** Indirect/Direct (30% Down, 70% Up)  
 XX= Color Temp Code (WW=Warm White 3000K, NW=Natural White 4000K, BW= Bright White 5000K)

LVLBP24 -

DI: 70D/30U  
 HH: 50U/50D  
 ID: 30D/70U

Add B for Batwing on Up-Light

46: 4ft  
 68: 6ft  
 90: 8ft

WW: 3000K  
 NW: 4000K  
 BW: 5000K

Mount Type  
 A  
 B  
 C  
 D

see top of page

S: Single Run  
 PE: Powered End  
 CE: Center Piece  
 EP: End Piece

