

Linear LED Fixture Spec Sheet




LVLBP34-XX-YY-ZZ
Pendant Mounted Up/Down Light Linear Lighting

Quick Specs

Part #	LVLBP34-XX-YY-ZZ
Sizes	4ft, 6ft, 8ft
Input Voltage	120-277VAC
Light Output	Up/Down: 412-875lu/ft
Efficiency	87 lumens/Watt
Color Rendering	>80 (CRI over 90 available)
Environment	Dry or Damp Location
Warranty	5-Year
Lifetime	50,000-70,000+ Hours
Listings	UL-Listed
Dimming	0-10V Dimmable to 1%



Dimensions



Available Color Temperatures

3000K



Warm White

4000K



Natural White

5000K



Bright White


Our 3" x 4" Linear LED Fixture is a pendant mounted linear up-light/down-light suitable for a wide variety of residential, commercial, retail, office, and hospitality lighting applications.

It is available in **4ft, 6ft, and 8ft** sizes as one single piece. Select "**linkable**" option for seam-less continuous runs over 8ft. Choose from (3) light distribution types: Direct/Indirect (70% Down, 40% Up); Half and Half (50% Up, 50% Down), and Indirect/Direct (30% Down, 70% Up)

Conveniently select from (3) standard color temperatures best suited to your space: **3000K** (Warm White), **4000K** (Natural White), **5000K** (Bright White).

Integral driver technology allows these fixtures to accept **universal 120-277VAC** input voltage, and are **fully dimmable to 1%** via 0-10V dimming wires. Includes 8ft power and premium stainless steel suspension cable.

Top Up-Light View

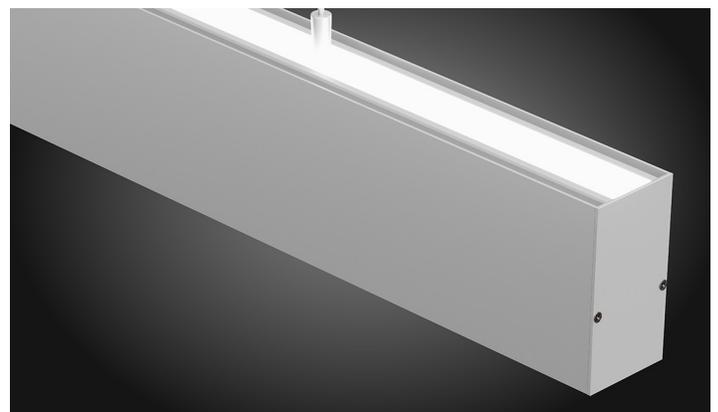

GlowbackLED®

16409 NW 8th Ave

Miami Gardens, FL 33169

1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc
©2020 Bluegate Inc. All Rights Reserved
Specifications subject to change without notice



Linear LED Fixture Spec Sheet



LVLBP34-XX-YY-ZZ

Pendant Mounted Up/Down Light Linear Lighting

Light Distribution

- Direct/Indirect (70% Down, 30% Up)
- Half/Half (50% Up, 50% Down)
- Indirect/Direct (30% Down, 70% Up)
- Batwing Add-On (Up-Light Only)

Mount Type

Select Ceiling Type:

- A** Drywall/Solid mount to JBOX
- B** Drywall/Solid to remote JBOX
- C** Drop Ceiling mount to T-Bar
- D** High Bay mount to Structure

Run Type

Single Run:

2ft 4ft 6ft 8ft 12ft 16ft

Continuous Run:

Powered End Center End

Detailed Product Specs

Fixture Size	Part #	Net Size	Wattage	Lumen Output (DWN)	Lumen Output (UP)
4ft	LVLBP34-DI-46-XX	46"	62	3,354	1,530
6ft	LVLBP34-DI-68-XX	68"	94	5,220	2,168
8ft	LVLBP34-DI-90-XX	90"	140	6,694	2,869
4ft	LVLBP34-HH-46-XX	46"	62	2,443	2,443
6ft	LVLBP34-HH-68-XX	68"	94	3,613	3,613
8ft	LVLBP34-HH-90-XX	90"	140	4,781	4,781
4ft	LVLBP34-ID-46-XX	24"	62	1,530	3,354
6ft	LVLBP34-ID-46-XX	68"	94	2,168	5,220
8ft	LVLBP34-ID-68-XX	90"	140	2,869	6,694

DI: Direct/Indirect (70% Down, 30% Up) | **HH:** Half and Half (50% Up, 50% Down) | **ID:** Indirect/Direct (30% Down, 70% Up)
 XX= Color Temp Code (WW=Warm White 3000K, NW=Natural White 4000K, BW= Bright White 5000K)

LVLBP34 -



DI: 70D/30U
HH: 50U/50D
ID: 30D/70U

Add **B** for Batwing on Up-Light



46: 4ft
68: 6ft
90: 8ft



WW: 3000K
NW: 4000K
BW: 5000K



Mount Type
A
B
C
D

see top of page



S: Single Run
PE: Powered End
CE: Center Piece
EP: End Piece

GlowbackLED®

16409 NW 8th Ave

Miami Gardens, FL 33169

1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc
 ©2020 Bluegate Inc. All Rights Reserved
 Specifications subject to change without notice

