


Linear LED Fixture Spec Sheet

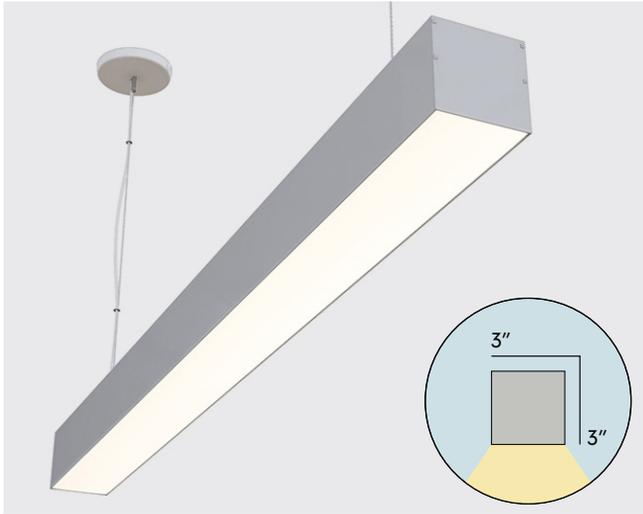

Our 3" x 3" Linear LED Fixture is a high output linear light source suitable for general lighting applications. It can be both **surface mounted**, or **pendant (suspended) mounted** with cables for a wide variety of residential, commercial, retail, and hospitality lighting applications.

This linear LED fixture is available in **2ft, 4ft, 6ft, and 8ft** sizes as one single piece. Select "**linkable**" option for seam-less continuous runs over 16ft. Choose from (2) light output levels: **SO** Standard Output (687 lumens/ft), or **HO** High-Output(1,243 lumens/ft). Conveniently select from (3) standard color temperatures best suited to your space: **3000K** (Warm White), **4000K** (Natural White), **5000K** (Bright White).

Integral driver technology allows these fixtures to accept **universal 120-277VAC** input voltage, and are **fully dimmable to 1%** via 0-10V dimming wires.

Features

- Universal **120-277VAC** Input.
- 0-10V **Dimmable**.
- 80+ **CRI** Standard, 90+ available.
- 687 or 1,243 **lumens/ft**.
- Suspension Kits Included!
- High Quality Look and Build.
- Made in the **USA** Quick Ship!
- **UL-Listed**.

Typical Lumen Table

Product Size	SO	HO
2ft	1,281 LM / 19W	1,831 LM / 25W
4ft	2,455 LM / 36W	3,509LM / 48W
6ft	3,630 LM / 53W	5,188 LM / 71W
8ft	4,804 LM / 70W	6,866 LM / 93W

*Based on standard sizes with 4000K Color Temperature

Specifications

*[XX] denotes color temperature

Part#	LVLBP33-XX-YY-ZZ
Sizes	2ft, 4ft, 6ft, 8ft, Custom
Input Voltage	120-277 VAC, or 347 VAC
Light Output	SO: 641 Lumens/ft HO: 916 Lumens/ft
Efficiency	70 Lumens/Watt, 74 Lumens/Watt
Color Rendering	>80 (CRI over 90 available)
Environment	Dry or Damp Location
Warranty	5-Year
Lifetime	50,000-70,000+ Hours
Listings	UL-Listed
Dimming	0-10V Dimmable, Phase/TRIAC
Light Distribution	Down Light

Available Colors




*Custom Available Upon Request






Finish Options

Standard	Custom
Satin Aluminum	Ruby Red RAL #3003
Matte Black	Traffic Yellow RAL #1023
Matte White	Bright Orange RAL #2009
	Island Skye RAL #6027
	Beige RAL #1001
	Sky Blue RAL #5015

*Extended lead times for custom RAL finishes. Any RAL color can be selected in addition to the one shown

Light Distribution



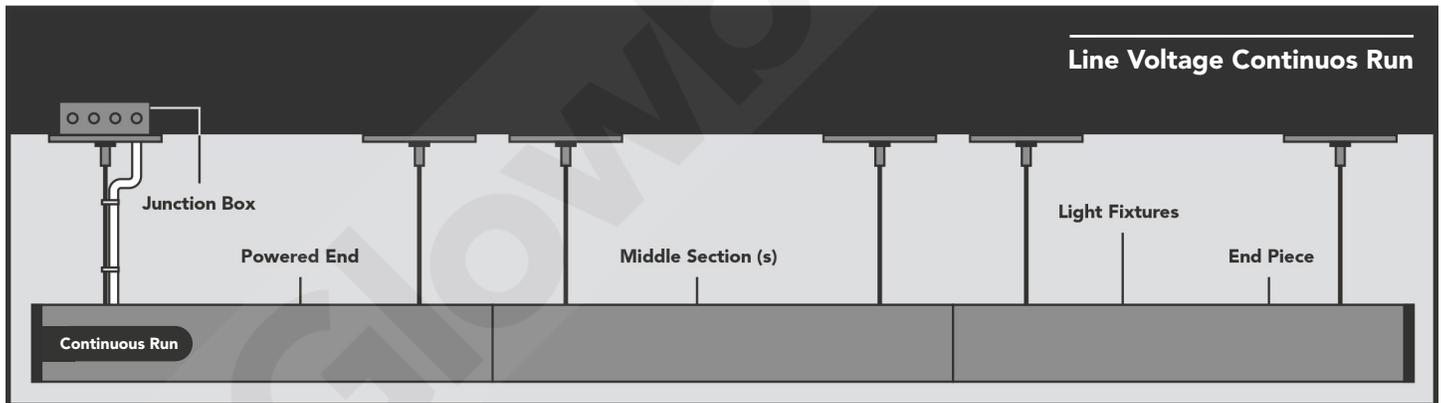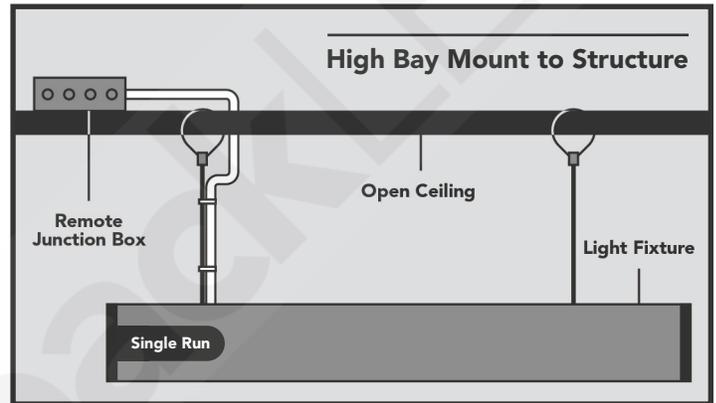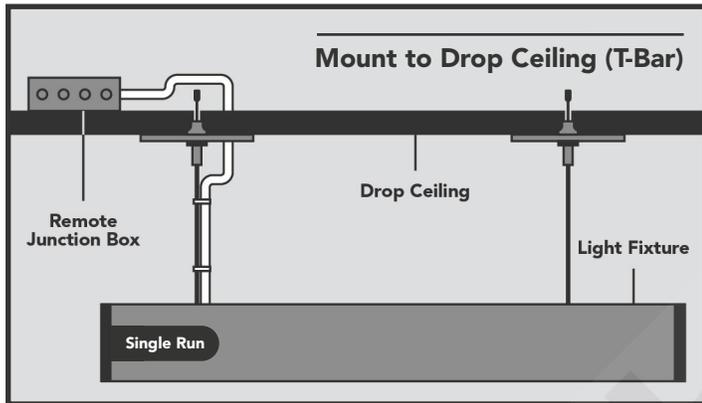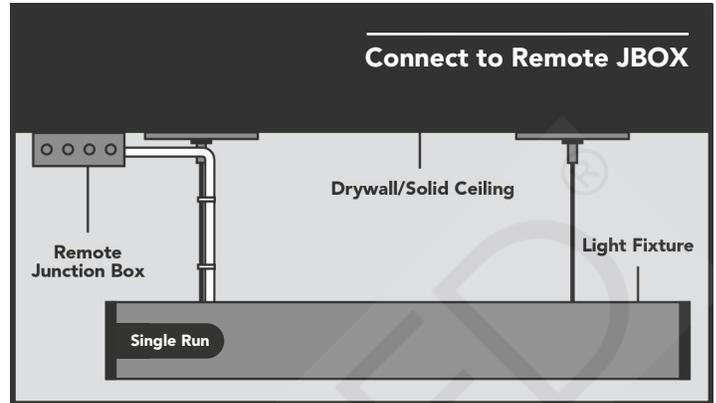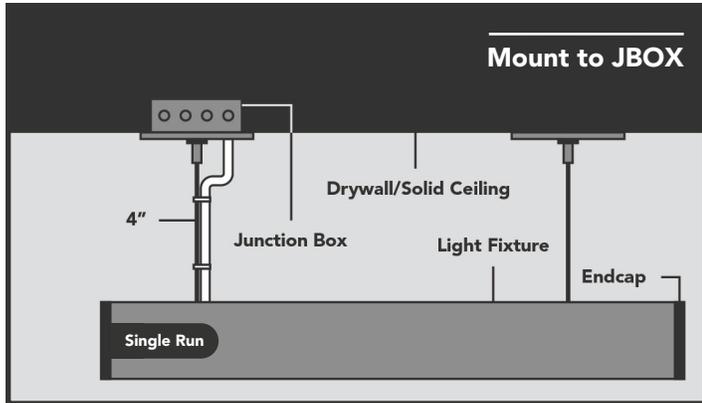

Standard Shapes			Custom Shapes				
L Configuration	Rectangle/Square Configuration	U Configuration	X Configuration	T Configuration	Hexagon Configuration	Triangle Configuration	Linear Abstract Configuration

*More custom shapes are available upon request

Master Product Code Builder	
Prefix	LVLB
Profile	P33
Finish	
Satin Aluminum	leave blank
Matte Black	BLK
Matte White	WHT
Custom	C
Output	
641 Lumens/ft	SO
916 Lumens/ft	HO
Size	
2ft	24
4ft	46
6ft	68
8ft	90
Custom	enter in inches
Continuous	CR
Custom Shape	CS
Color	
3000K	WW
4000K	NW
5000K	BW
Custom	enter CCT value
RGB+5000K	RGBW
RGB+2700K	RGBWW
Tunable White	CCT
CRI	
80+	leave blank
90+	90
95+	95
Mount Type	
Mount to JBOX	A
Remote JBOX	B
Drop Ceiling	C
High Bay	D
Voltage	
120-277VAC	leave blank
347VAC	347
Dimming/Control	
0-10V	leave blank
Phase/TRIAC	TRIAC
DMX	DMX
Emergency	
None	leave blank
EM Back Up	EM* 4ft min for EM
Run Type	
Single	leave blank
C/R Powered End	CRP
C/R Middle	CRM
C/R End Piece	CRE
NA	leave blank
Shapes	
NA	leave blank
Standard Shape	S/S
Custom Shape	C/S

