


Linear LED Fixture Spec Sheet

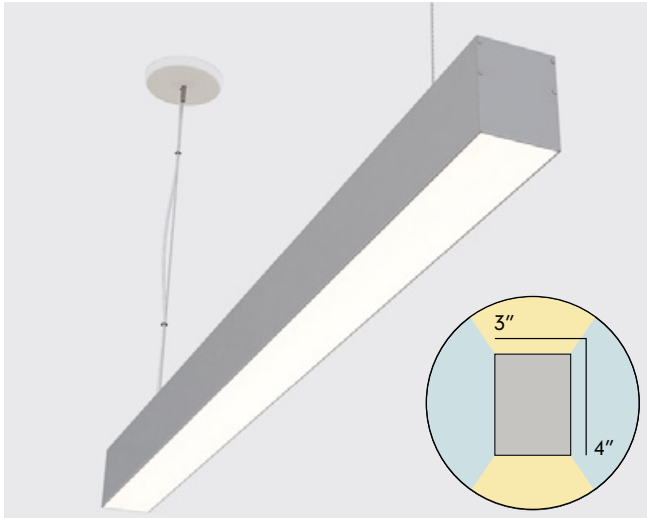

Our 3" x 4" Linear LED Fixture is a pendant mounted linear up-light/down-light suitable for a wide variety of residential, commercial, retail, office, and hospitality lighting applications.

It is available in **4ft, 6ft, and 8ft** sizes as one single piece. Select "linkable" option for seam-less continuous runs over 8ft. Choose from (3) light dis-tribution types: Direct/Indirect (70% Down, 40% Up); Half and Half (50% Up, 50% Down), and Indirect/Di-rect (30% Down, 70% Up).

Conveniently select from (3) standard col-or temperatures best suited to your space: **3000K** (Warm White), **4000K** (Natural White), **5000K** (Bright White). Integral driver technology allows these fixtures to accept **universal 120-277VAC** input voltage, and are **fully dimmable to 1%** via 0-10V dimming wires. Includes 8ft power and premium stainless steel sus-pension cable.

Features

- Universal **120-277VAC** Input.
- 0-10V **Dimmable**.
- 80+ **CRI** Standard, 90+ available.
- Multiple Light Distribution Options!
- Suspension Kits Included!
- High Quality Look and Build.
- Made in the **USA** Quick Ship!
- **UL-Listed**.

Typical Lumen Table

Size	70U/30D	30U/70D	50U/50D	Watts
4ft	4,928U/2,112D	2,112U/4,928D	3,520U/ 3,520D	62
6ft	7,392U/3,168D	3,168U/7,392D	5,280U/5,280D	94
8ft	9,856U/4,244D	4,244U/9,856D	6,264U/6,264D	125


*Based on standard sizes with 4000K Color Temperature

Specifications

*[XX] denotes color temperature

Part#	LVLBP34-XX-YY-ZZ
Sizes	4ft, 6ft, 8ft, Custom
Input Voltage	120-277 VAC
Light Output	Up/Down: 412-875 Lumens/ft
Efficiency	87 Lumens/Watt
Color Rendering	>80 (CRI over 90 available)
Environment	Dry or Damp Location
Warranty	5-Year
Lifetime	50,000-70,000+ Hours
Listings	UL-Listed
Dimming	0-10V Dimmable, Phase/TRIAC
Light Distribution	Up/Down

Available Colors

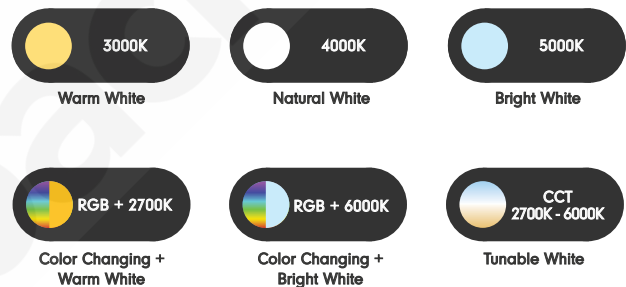


*Custom Available Upon Request






Finish Options

Standard	Custom
Satin Aluminum	Ruby Red RAL #3003
	Traffic Yellow RAL #1023
	Bright Orange RAL #2009
	Island Skye RAL #6027
	Beige RAL #1001
	Sky Blue RAL #5015

*Extended lead times for custom RAL finishes. Any RAL color can be selected in addition to the one shown

Light Distribution



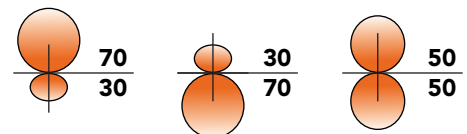


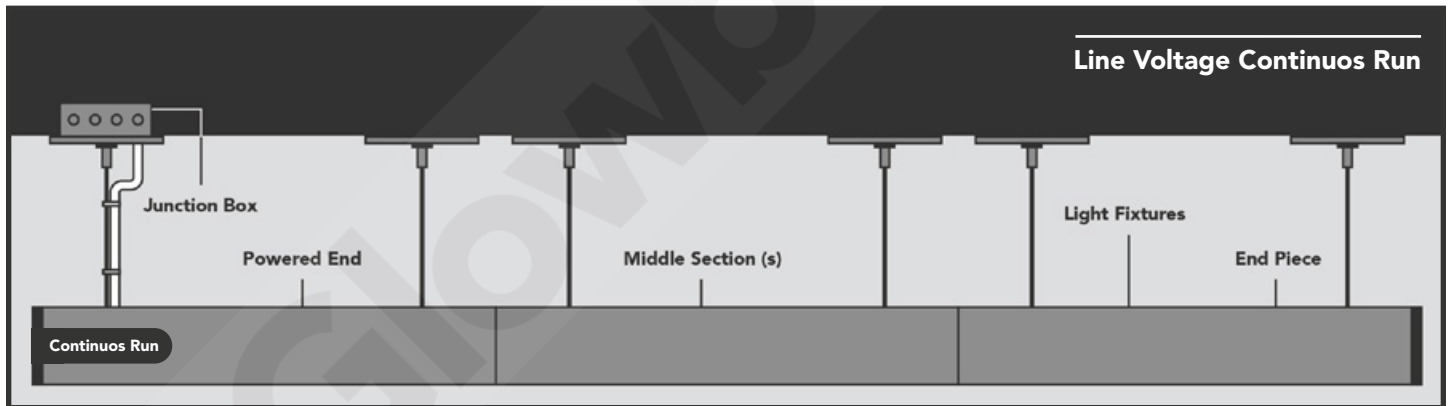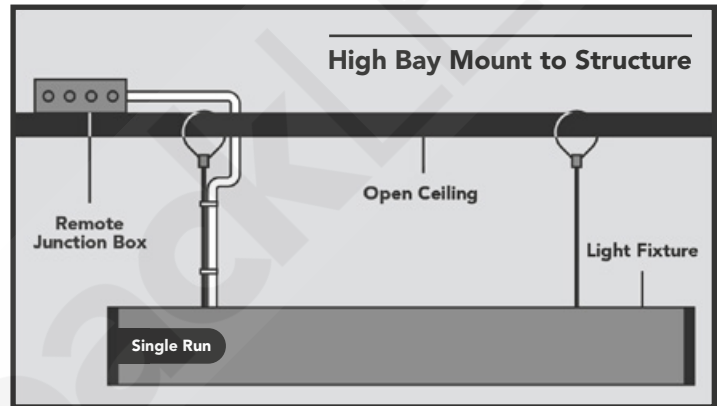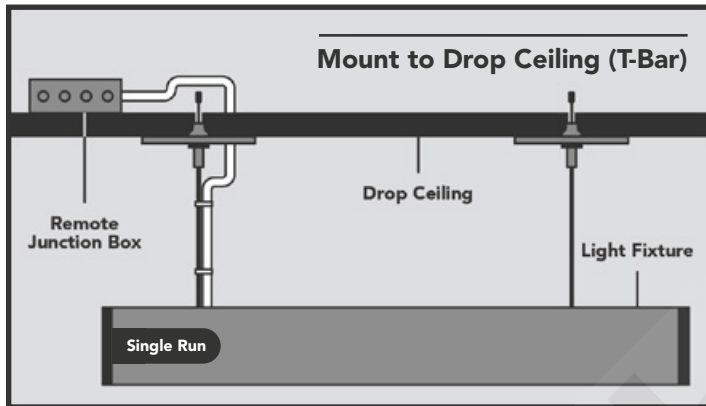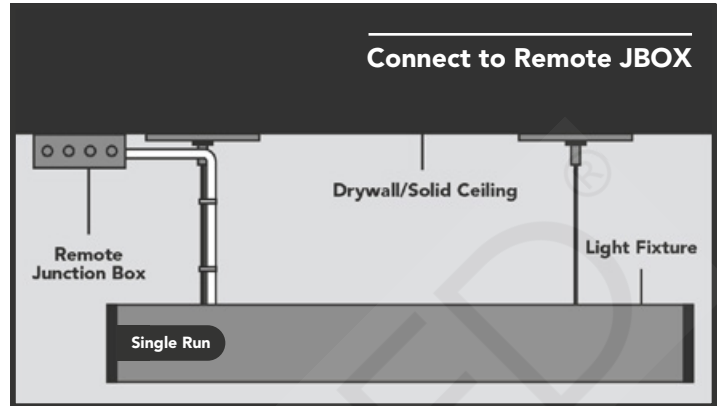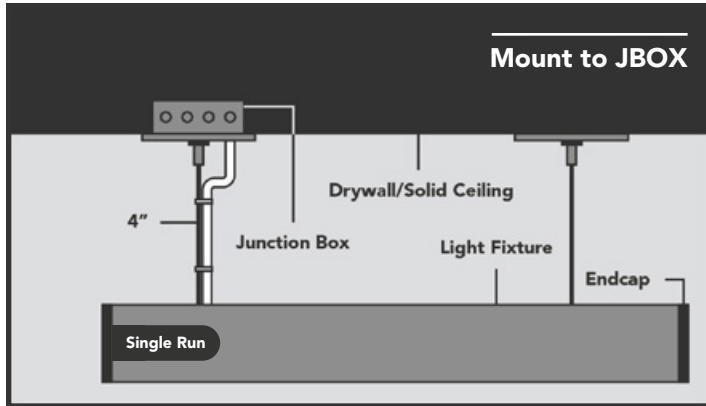

Standard Shapes			Custom Shapes				
L Configuration	Rectangle/Square Configuration	U Configuration	X Configuration	T Configuration	Hexagon Configuration	Triangle Configuration	Linear Abstract Configuration

*More custom shapes are available upon request

Master Product Code Builder	
Prefix	LVLB
Profile	P34
Finish	
Satin Aluminum	leave blank
Matte Black	N/A
Matte White	N/A
Custom	C
Output	
70%/30%	70UP/30D, 70D, 30U
50%/50%	50U/50D
Size	
2ft	24
4ft	46
6ft	68
8ft	90
Custom	enter in inches
Continuous	CR
Custom Shape	CS
Color	
3000K	WW
4000K	NW
5000K	BW
Custom	enter CCT value
RGB+5000K	N/A
RGB+2700K	N/A
Tunable White	N/A
CRI	
80+	leave blank
90+	90
95+	95
Mount Type	
Mount to JBOX	A
Remote JBOX	B
Drop Ceiling	C
High Bay	D
Voltage	
120-277VAC	leave blank
347VAC	347
Dimming/Control	
0-10V	leave blank
Phase/TRIAC	TRIAC
DMX	DMX
Emergency	
None	leave blank
EM Back Up	EM* 4ft min for EM
Run Type	
Single	leave blank
C/R Powered End	CRP
C/R Middle	CRM
C/R End Piece	CRE
NA	leave blank
Shapes	
NA	leave blank
Standard Shape	S/S
Custom Shape	C/S

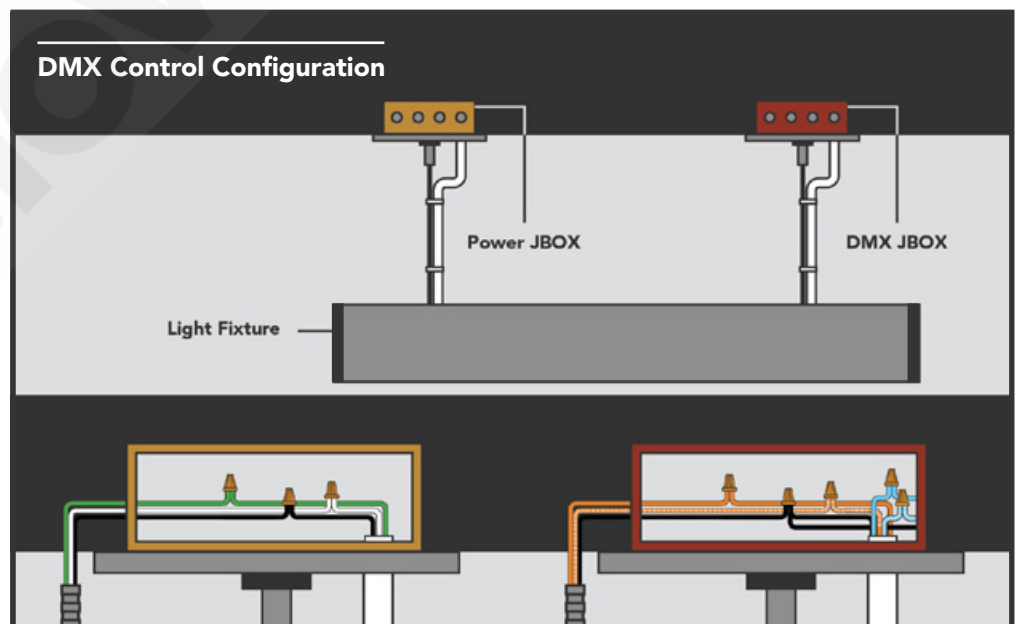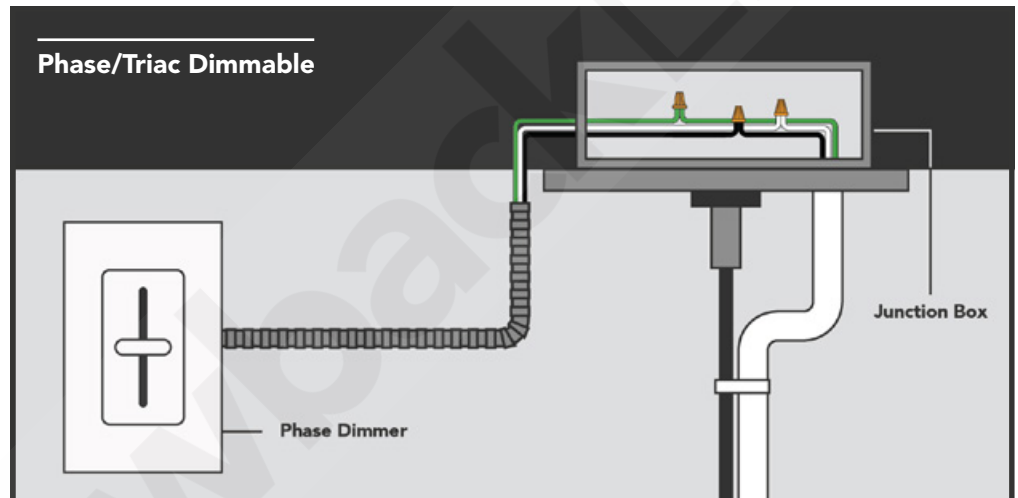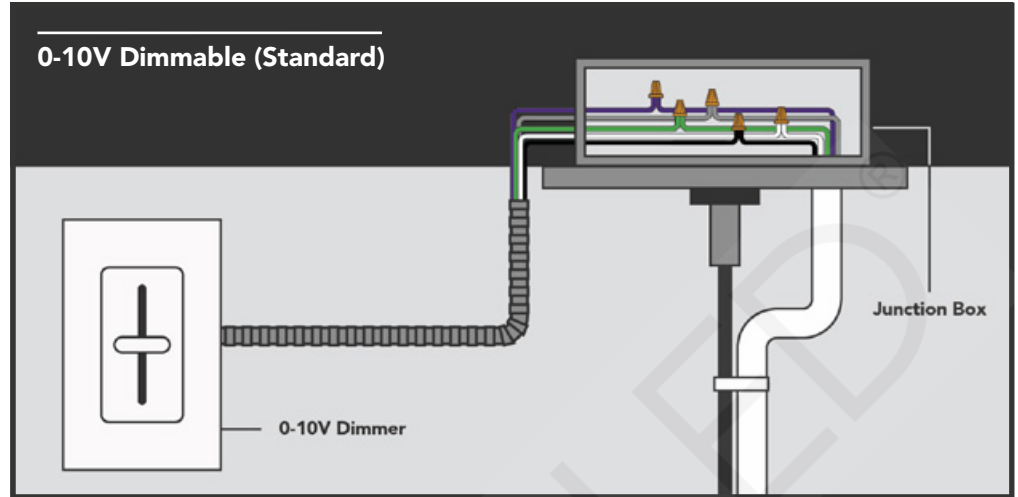

Project Name

Ordering Form

QTY	LVLBP34	Finish	Output	Size	Color	CRI	Mount Type	Voltage	Dimming/Control	Emergency	Run Type	Shapes	Project Fixture Type
	LVLBP34	BLK	50	90	WW	90	A						ST-5
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												
	LVLBP34												

Custom Configuration Notes
