


# Linear LED Fixture Spec Sheet

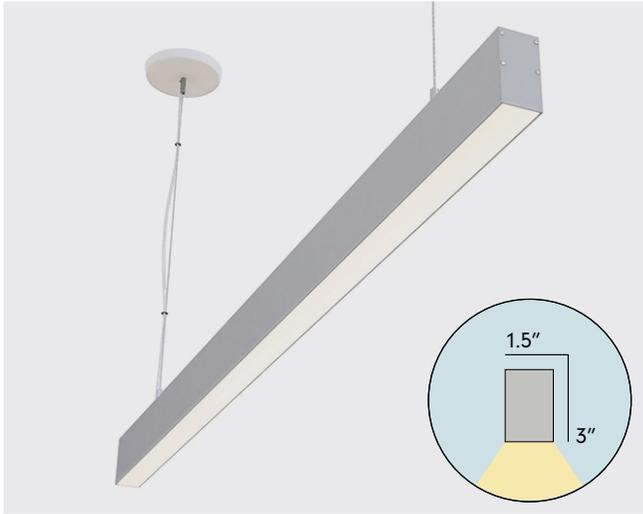

Our 1.5" x 3" Linear LED Fixture is a high output linear light source suitable for general lighting applications. It can be both **surface mounted**, or **pendant (suspended) mounted** with cables for a wide variety of residential, commercial, retail, and hospitality lighting applications.

This linear LED fixture is available in **2ft, 4ft, 6ft, and 8ft** sizes as one single piece. Select "**linkable**" option for seam-less continuous runs over 8ft. Conveniently select from (3) standard color temperatures best suited to your space: **3000K** (Warm White), **4000K** (Natural White), **5000K** (Bright White).

Integral driver technology allows these fixtures to accept **universal 120-277VAC** input voltage within the compact aluminum housing.

## Features

- Universal **120-277VAC** Input.
- **Non-Dimmable**.
- 80+ **CRI** Standard, 90+ available.
- 1,210 **lumens/ft**.
- Suspension Kits Included!
- High Quality Look and Build.
- Made in the **USA** Quick Ship!
- **UL-Listed**.

## Typical Lumen Table

Product Size	SO
2ft	1,210 LM / 16W
4ft	2,420 LM / 31W
6ft	3,630 LM / 47W
8ft	4,840 LM / 62W

\*Based on standard sizes with 4000K Color Temperature

## Specifications

\*[XX] denotes color temperature

<b>Part#</b>	LVLBP1.5-XX-YY-ZZ
<b>Sizes</b>	2ft, 4ft, 6ft, 8ft, Custom
<b>Input Voltage</b>	120-277 VAC, or 347 VAC
<b>Light Output</b>	SO: 1,210 lumens (605 lumens/foot)
<b>Efficiency</b>	77 Lumens/Watt
<b>Color Rendering</b>	>80 CRI, >90 CRI
<b>Environment</b>	Dry or Damp Location
<b>Warranty</b>	5-Year
<b>Lifetime</b>	70,000+Hours
<b>Listings</b>	UL-Listed
<b>Dimming</b>	Non-Dimmable
<b>Light Distribution</b>	Down Light

## Available Colors




\*Custom Available Upon Request






## Finish Options

Standard	Custom
Satin Aluminum	Ruby Red RAL #3003
	Traffic Yellow RAL #1023
	Bright Orange RAL #2009
	Island Skye RAL #6027
	Beige RAL #1001
	Sky Blue RAL #5015

\*Extended lead times for custom RAL finishes. Any RAL color can be selected in addition to the one shown

## Light Distribution



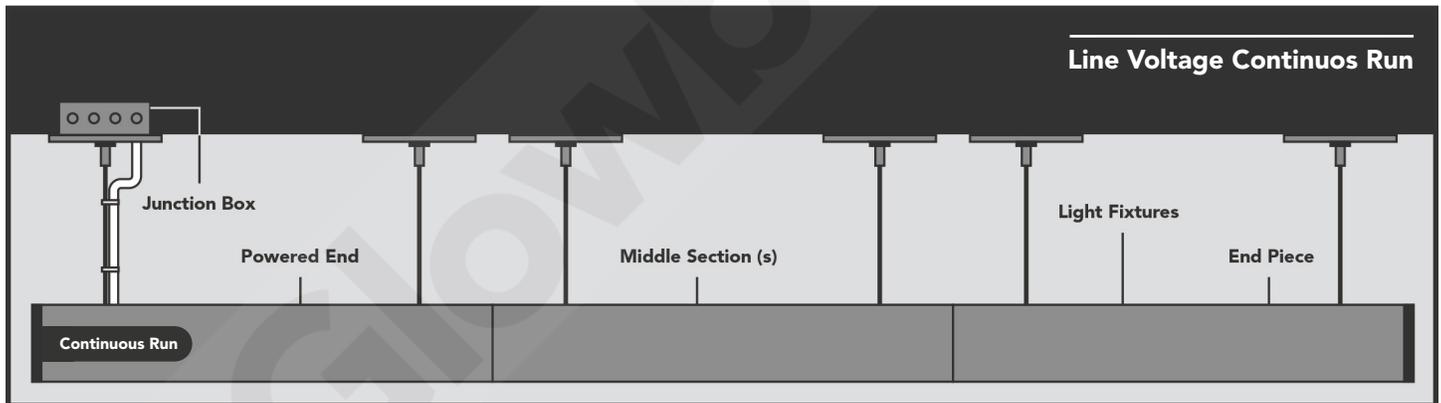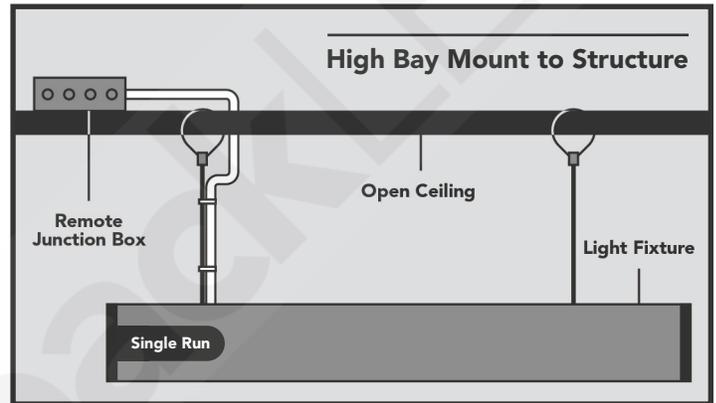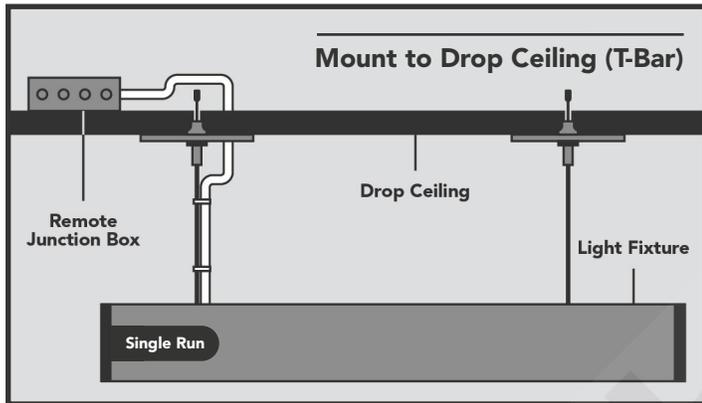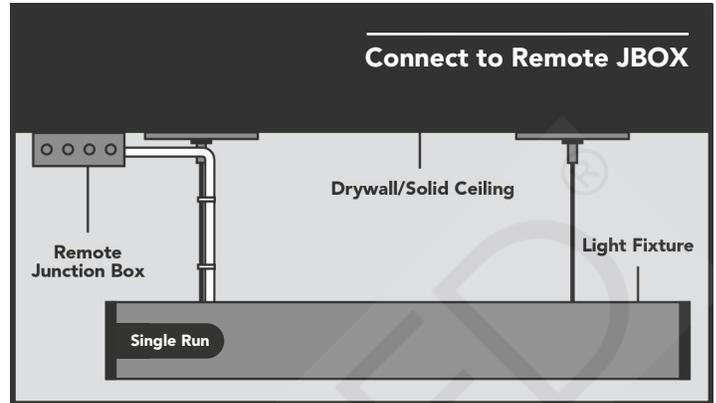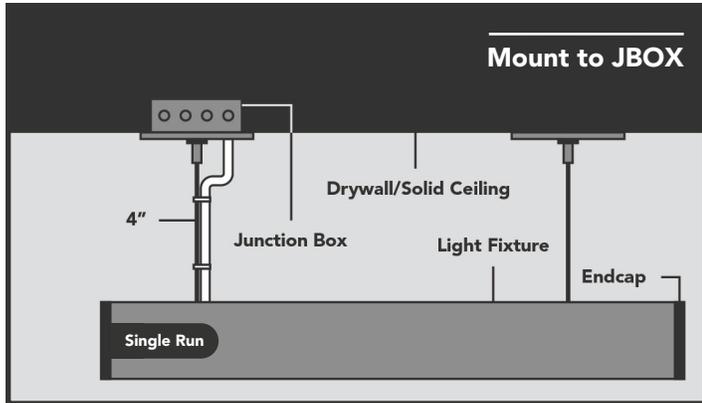

Standard Shapes			Custom Shapes				
L Configuration	Rectangle/Square Configuration	U Configuration	X Configuration	T Configuration	Hexagon Configuration	Triangle Configuration	Linear Abstract Configuration

\*More custom shapes are available upon request

Master Product Code Builder	
Prefix	LVLB
Profile	P1.5
Finish	
Satin Aluminum	leave blank
Matte Black	N/A
Matte White	N/A
Custom	C
Output	
605 Lumens/ft	SO
1,210 Lumens/ft	HO
Size	
2ft	24
4ft	46
6ft	68
8ft	90
Custom	enter in inches
Continuous	CR
Custom Shape	CS
Color	
3000K	WW
4000K	NW
5000K	BW
Custom	enter CCT value
RGB+5000K	N/A
RGB+2700K	N/A
Tunable White	N/A
CRI	
80+	leave blank
90+	90
95+	95
Mount Type	
Mount to JBOX	A
Remote JBOX	B
Drop Ceiling	C
High Bay	D
Voltage	
120-277VAC	leave blank
347VAC	347
Dimming/Control	
0-10V	leave blank
Phase/TRIAC	N/A
DMX	N/A
Emergency	
None	leave blank
EM Back Up	EM* 4ft min for EM
Run Type	
Single	leave blank
C/R Powered End	CRP
C/R Middle	CRM
C/R End Piece	CRE
NA	leave blank
Shapes	
NA	leave blank
Standard Shape	S/S
Custom Shape	C/S

