

Product Overview



Aluminum Profile P6 ALUMP6 Spec Sheet



A perfect solution for residential, office, or retail lighting applications, Aluminum Profile "P6" creates a stunning 2" wide aperture of light which can either be suspended from the ceiling or surface mounted. Aluminum Profile "P6" can accommodate up to two rows of high-output LED strips, with an inner dimension of 1.60" (40.6mm) wide and is suitable for general lighting applications. Extruded from high-quality aluminum, this extrusion acts as a heat-sink by drawing out the heat generated by your high-output strip lighting. For dot-free, evenly diffused lighting, install with (2) rows of our high-density **DOTLESS** LED strips. Aluminum Profile "P6" is conveniently sold in 8ft lengths as a completed kit including a pair of end-caps, suspension kits, and one premium poly carbonate frosted lens (diffuser).


Features

- 2" Wide Design for Attractive General Lighting Applications
- Maximizes Lifetime of LED strips by dissipating heat.
- Can accommodate up to (2) rows of high-power LED strips
- Cuttable using any standard miter saw
- Fast and Easy Installation using suspension kit, or screwing into surface

Specifications

Part #	ALUMP6-96
Length	8ft (94" for free shipping*)
Width	1.97" (50.0mm)
Height	1.38" (35.1mm)
Lens Type	Frosted
MAX Light	10 Watts/ft (recommended)
MAX Strip Size	1.60" (40.6mm)

Dimensions

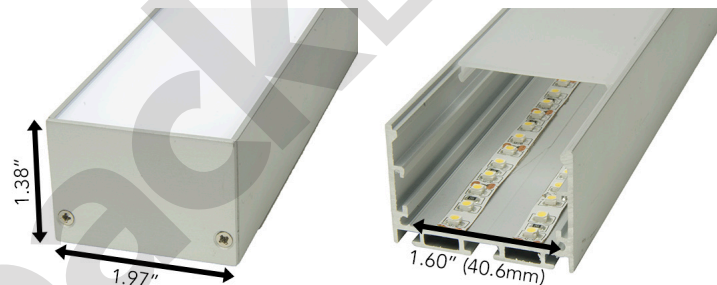


Mounting

- Use included suspension kit
- **Direct Screw:** Counter-Sunk Mounting Screws. (Strip installed over screw)

DOTS

120/M (Double-Row)
(36/ft) White LED Strip
DOTLESS

60/M (Double-Row)
(18/ft) RGB/RGB+W LED
Strip **DOTLESS**

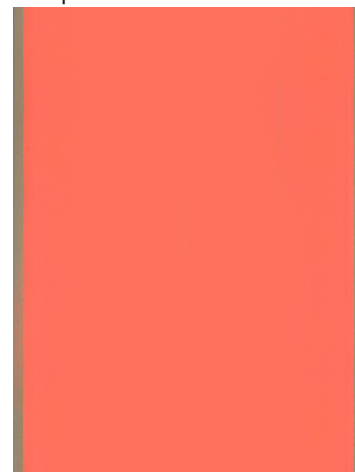

GlowbackLED®

16409 NW 8th Ave

Miami Gardens, FL 33169

1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc
©2019 Bluegate Inc. All Rights Reserved
Specifications subject to change without notice

