


Product Overview





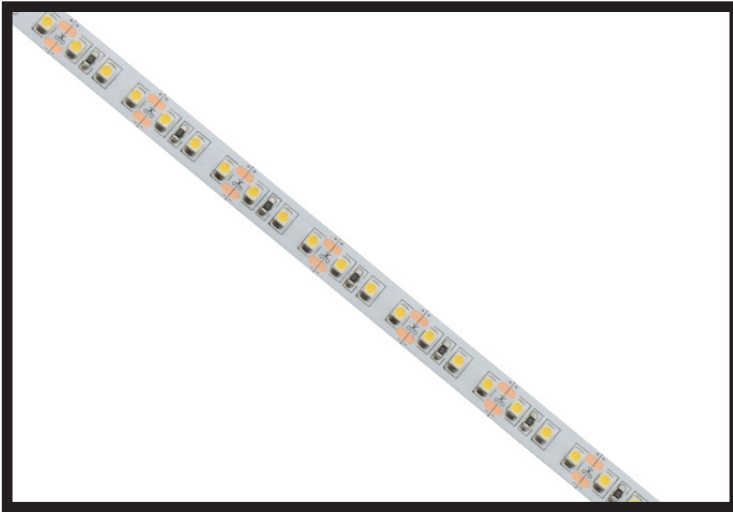

LED Strip CS35120CRI
CS35120CRI Spec Sheet



Designed specifically for high-quality linear LED lighting installations, our **Designer-Grade 12V White CS35120CRI** LED strip allows you to create long lasting, headache-free lighting installations with an **ultra high CRI** rating of **95+**, right out of the package. Easily cut, peel, and stick the flexible light tape to your mounting surface using the durable and permanent 3M® adhesive backing. Achieve well over **50,000 hours** of useful lighting when used with one of our aluminum profiles for LED strips to draw out the heat and protect the strips from damaging elements. Our **12V White CS3510CRI** LED Strip comes with the UL-stamp of approval and is **UL-listed** for use in both the United States and Canada (cUL).

The **12V White CS35120CRI** LED Strip comes in a **16'5" roll/reel** and is **0.39" (10mm) wide**. **3528** LED chips are mounted on a flexible PCB every **0.32"** apart. The full LED strip spool has about **600** LED chips packed in a **high-density—36 LED/ft (120/M)**—configuration. The LED strip comes with **(1) 6" 18-2 wire lead** with bare, tin-coated ends, for fast and reliable wire-to-wire connections. This LED Strip produces an average of **297 lumens/foot** and consumes an average of **3.5 Watts/ft and 85 lumens/watt**. Effortlessly cut this LED strip every **1"** (or every 3 LED chips).

Available Colors

2700K	3000K	4000K	6000K
			
Incandescent White	Warm White	Natural White	Bright White

Strip Specifications


Part #	CS35120CRIXX*
Roll Length	16' 5" (197")
Input Voltage	12VDC
Strip Width	0.39" (10mm)
Cut Increments	Cutable every 1"
Color Rendering	>90
LED Type	3528
LED Density	36 LED's per foot (120/M)
Wattage	3.5 Watts/ft
Light Output	297 Lumens/ft
Efficiency	85 Lumens/Watt
Lifetime	50,000 Hours (Average)
Warranty	3-Year Limited Warranty
IP-Rating	IP-23 (For Indoor Use Only)
Listings	UL-Listed (US and Canada)

* Color Temp of LED strip. **IW** (2700K), **WW** (3000K), **NW** (4000K), **BW** (6000K)

Features

- **Ultra-High Color Rendering 95+**
- **High Density (120/M) or 36 LED/ft configuration**
- **High-Quality LED Strip!** Excellent thermal management for lasting installations.
- **UL-Listed!** (in US and Canada) Specify our strips on any commercial project!
- **Dimmable** with dimmable power supply

Cut Points

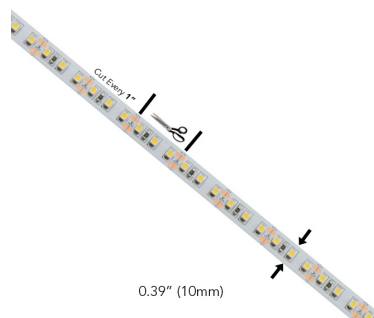

Packaging



GlowbackLED®
16409 NW 8th Ave
Miami Gardens, FL 33169
1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc
©2019 Bluegate Inc. All Rights Reserved
Specifications subject to change without notice

