




Linear LED Fixture Spec Sheet

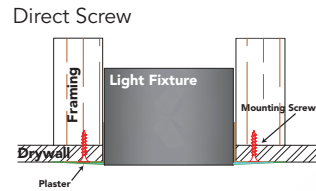

LVLBY23T-XX-YY-ZZ
LVLBY23T Spec Sheet

Mounting Options

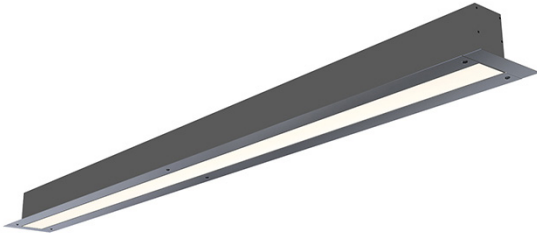

Our **LVLBY23T trimless** LED Light Fixture is perfect for use in commercial or residential areas. Our **LVLBY23T** is a 2 inch wide line-voltage recessed linear LED light fixture capable of holding high output strips, making it suitable for a wide variety of linear lighting applications and an excellent solution for lighting garages, warehouses, or industrial lighting. With a **trimless, "mud-in"** flange this fixture can be seamlessly recessed into any surface with at least 3" of depth. Our **LEDBAR Y23T** features an integrated driver that allows one to plug the fixture directly into the line-voltage power source of the location. This fixture is available in standard sizes ranging from 24"-96" **custom sizes available upon request** as one continuous run, or in longer runs which can be achieved through linkable or custom configurations.

Features

- **120-277VAC** or **347VAC** Input
- Standard >80 CRI, CRI>90 available!
- **Trimless** Design Achieves **Seamless Recession**
- 0-10V Dimmable (With Dimmable Driver)
- Ultra Long Lifetime (70,000+ Hours)
- UL-Listed
- **5-Year Warranty**

Available Colors

3000K



4000K




6000K




Quick Specs

Sizes	Any size from 4"-96" (Linkable For Long runs)
Input Voltage	120-277 or 347VAC
Power Output	Power Output Per Size 2ft: 16W 4ft: 31W 6ft: 47W 8ft: 62W
Light Output	Lumen Output Per Size 2ft: 1,210 4ft: 2,420 6ft: 3,630 8ft: 4,840
Efficiency	77 lumens/Watt (White)
Lifetime	70,000+ Hours (L-70)
Environment	Suitable for Dry or Damp Locations

Power-Feed Type

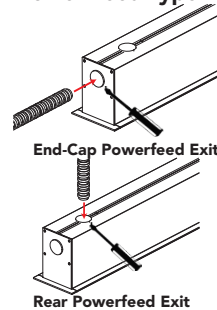

Dimensions

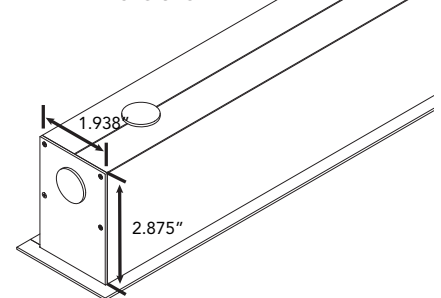

LVLBY23T-



SO: 605 lu/ft



24: 2ft
46: 4ft
68: 6ft
90: 8ft



WW: 3000K
NW: 4000K
BW: 5000K



Mount Type
A: Direct-Screw
see top of page



Power Entry
A: Rear
B: End-Cap

GlowbackLED®

16409 NW 8th Ave

Miami Gardens, FL 33169

1-800-679-4902 • info@bluegateinc.com

GlowbackLED® is a registered trademark of Bluegate Inc
©2020 Bluegate Inc. All Rights Reserved
Specifications subject to change without notice

