

# Product Overview



## Aluminum Profile Q ALUMQ Spec Sheet



Aluminum Profile "Q" is a recess mounted aluminum housing for high-output LED strips. It can be recessed into drywall to create flush-mounted lines of lighting. When used with our high-density, DOTLESS LED strips you can create an evenly diffused, dot-free, 7/8" line of recessed lighting. Use the provided spring activated clips to easily recess the housing into your space (NOTE: space required above drywall). Aluminum Profile "Q" can accommodate any high-output LED strip up to 0.72" wide (18.3mm) and properly dissipate the heat for maximum longevity. Aluminum Profile "Q" is sold in 6.5ft lengths (78") as a completed kit including a pair of end-caps, (3) spring activated drywall-clips, and a premium poly-carbonate frosted lens (diffuser).


### Features

- 0.93" Wide, High-Output Recessed Lighting
- High-Quality aluminum draws the heat out of your LED's to preserve lifetime.
- Easily Recessable using provided clips OR direct-screw method (recommended)
- Protect strips from the elements
- Cuttable with any standard miter saw

### Specifications

Part #	ALUMQ-78
Length	6.5ft (78")
Width	0.93" (1.42" w/ Flange)
Height	1.10" (27.9mm)
Recess Cavity	0.93" W x 1.00" D
Lens Type	Frosted
MAX Light	6 Watts/ft (recommended)
MAX Strip Size	0.72" (18.3mm)

### Dimensions

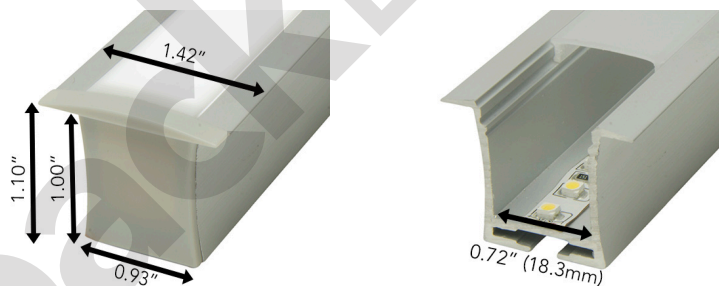

### Mounting

- Use included Mounting Clips
- Use all purpose Adhesive
- **Direct Screw:** Counter-Sunk Mounting Screws. (Strip installed over screw)

### DOTS

60/M (18/ft) White LED Strip **DOTLESS**



120/M (36/ft) White LED Strip **DOTLESS**



30/M (9/ft) RGB LED Strip



60/M (18/ft) RGB/RGB+W LED Strip **DOTLESS**

